

147 50

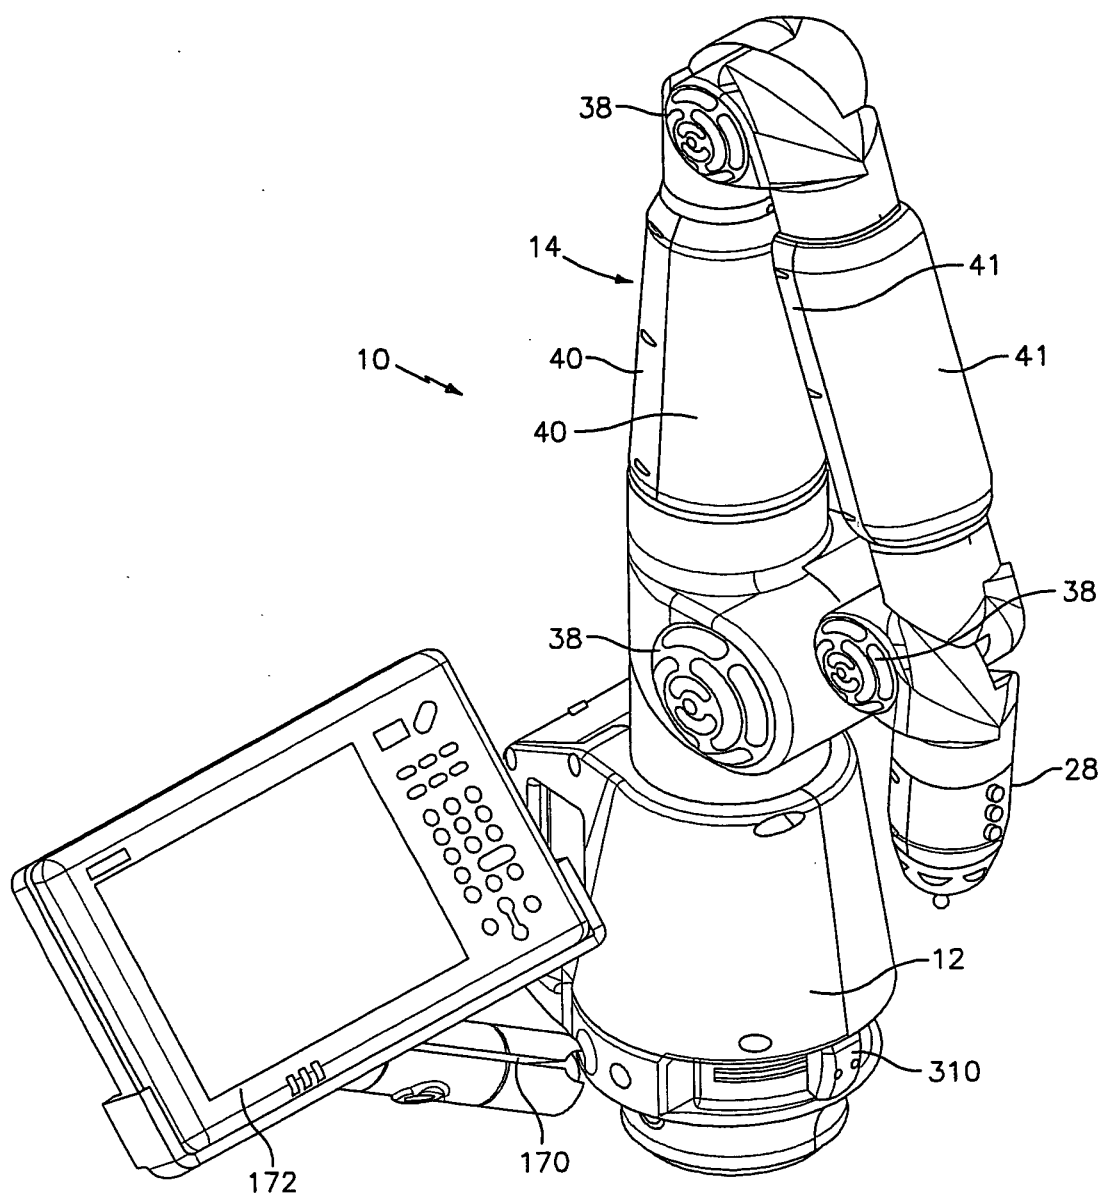


FIG. 1

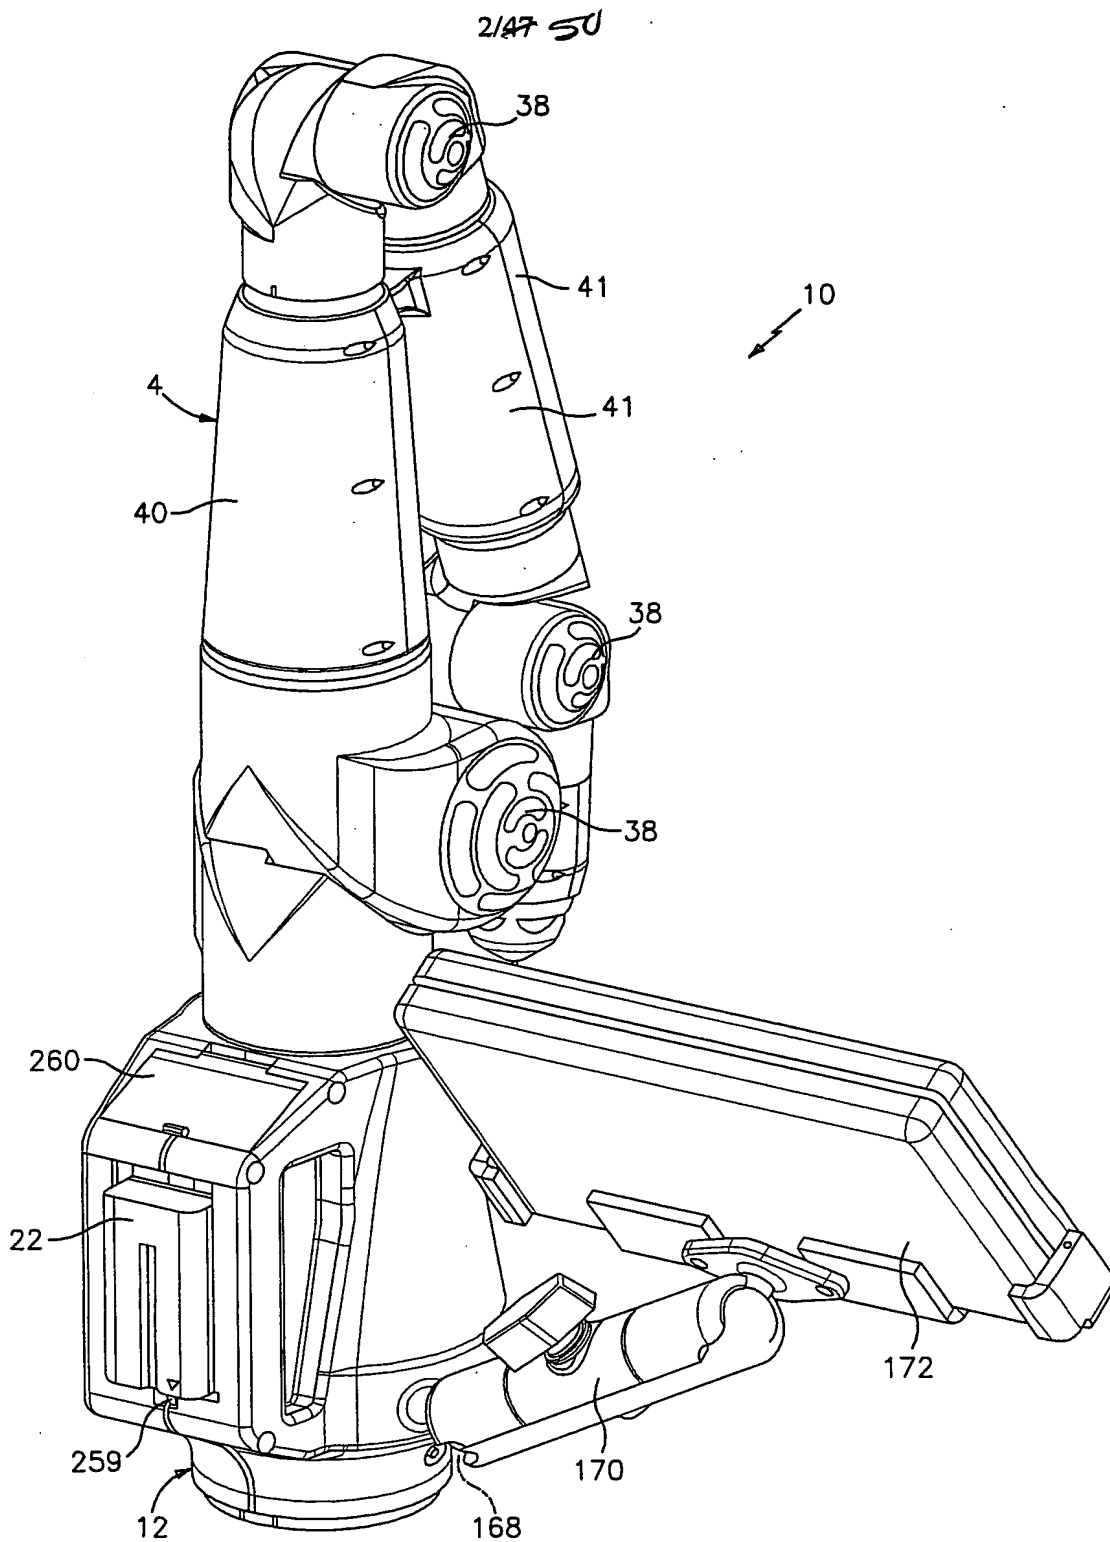


FIG. 2

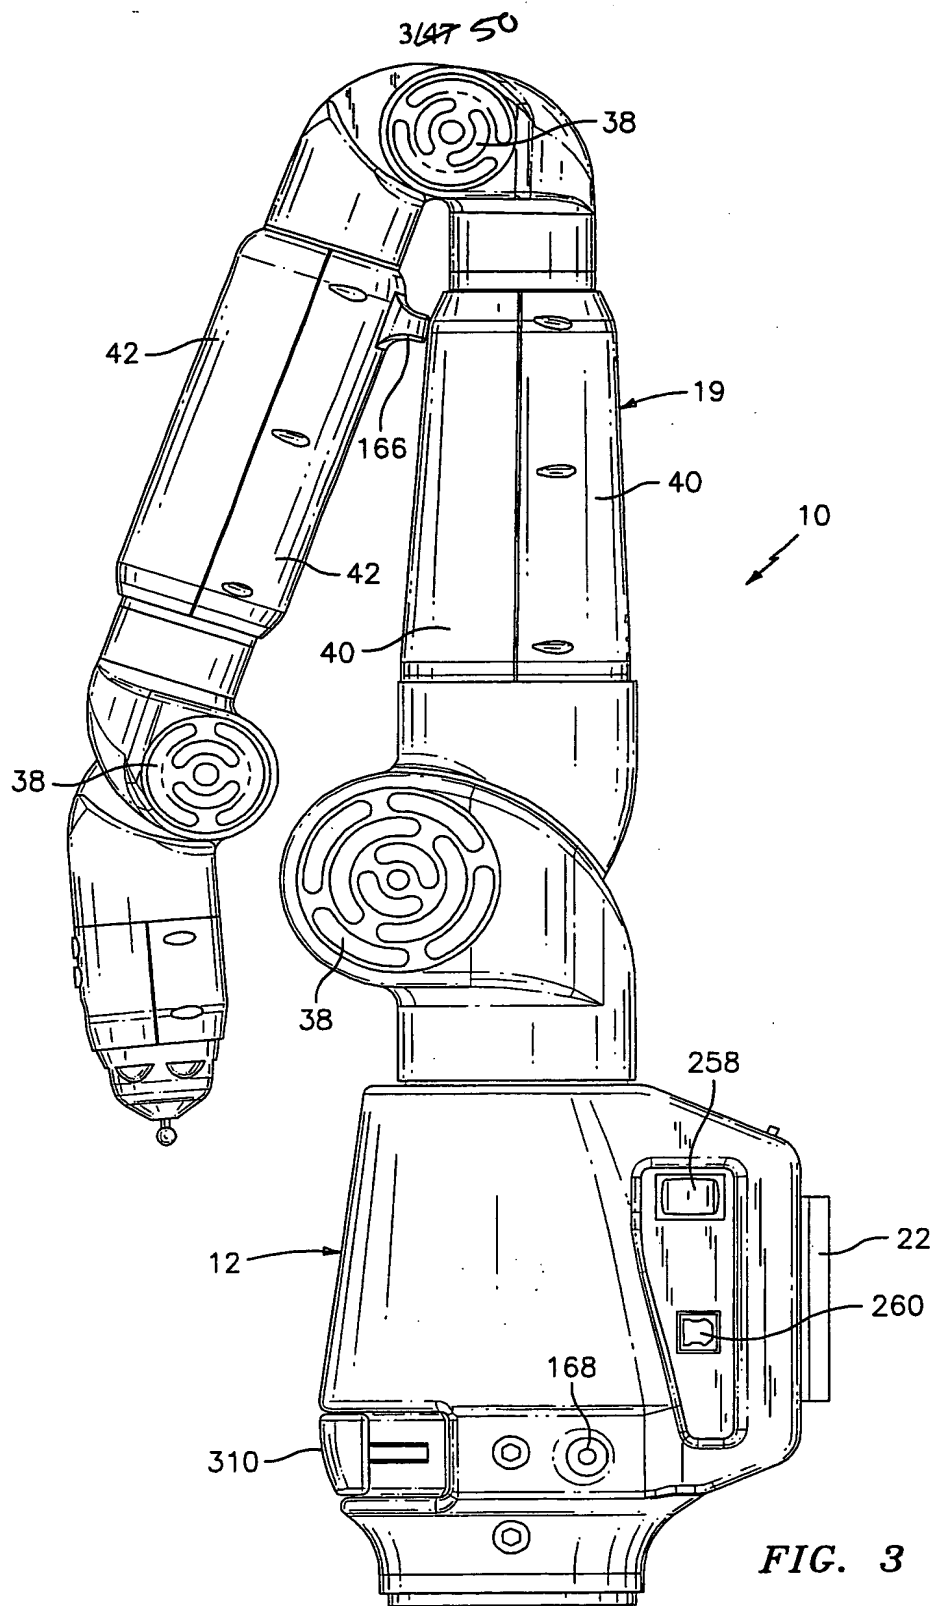


FIG. 3

41/4T 50

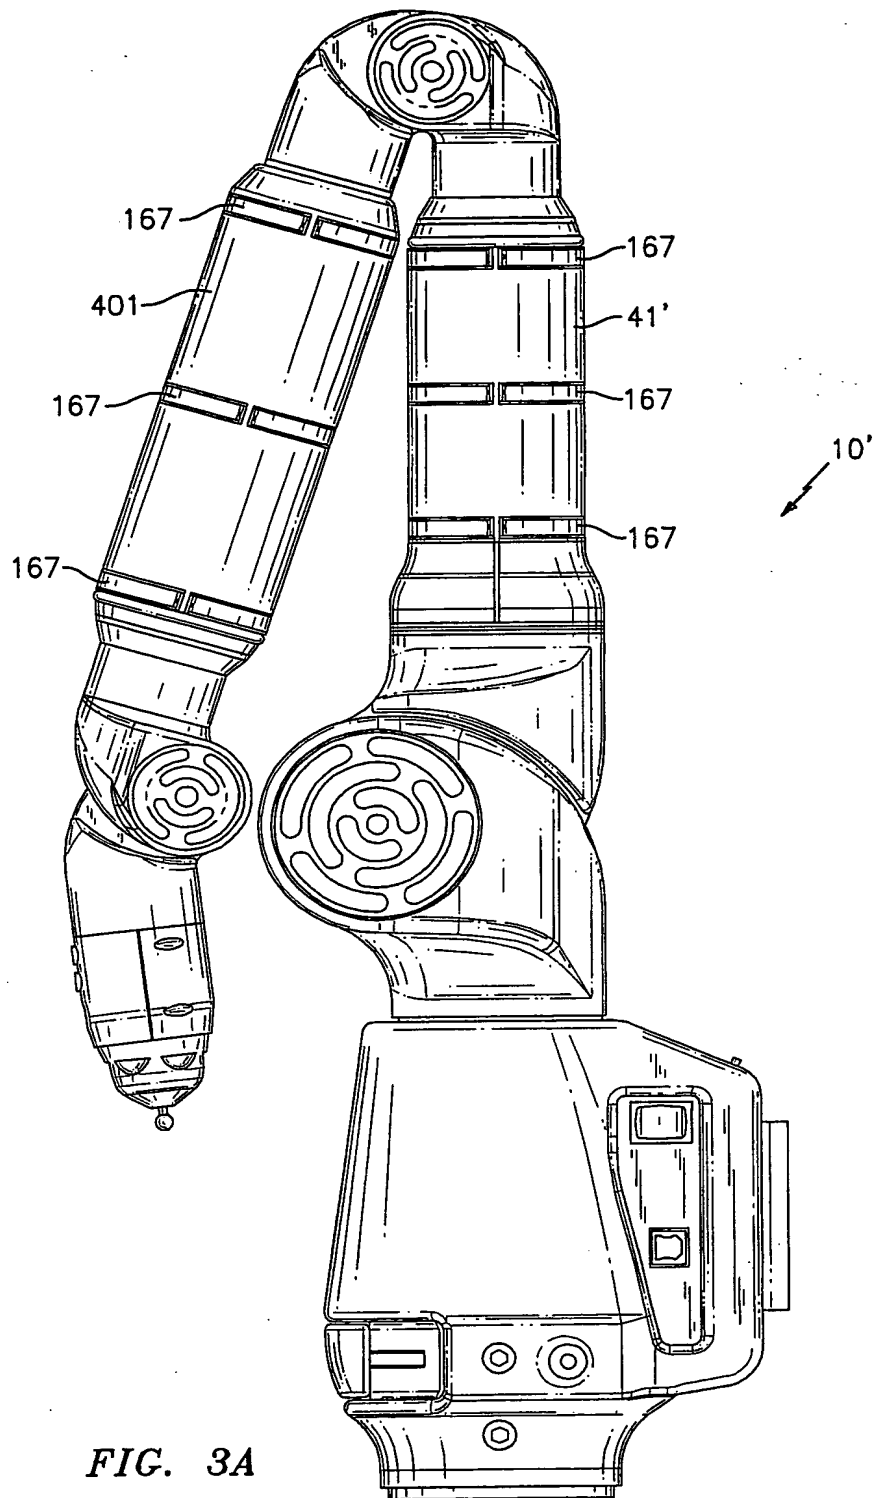


FIG. 3A

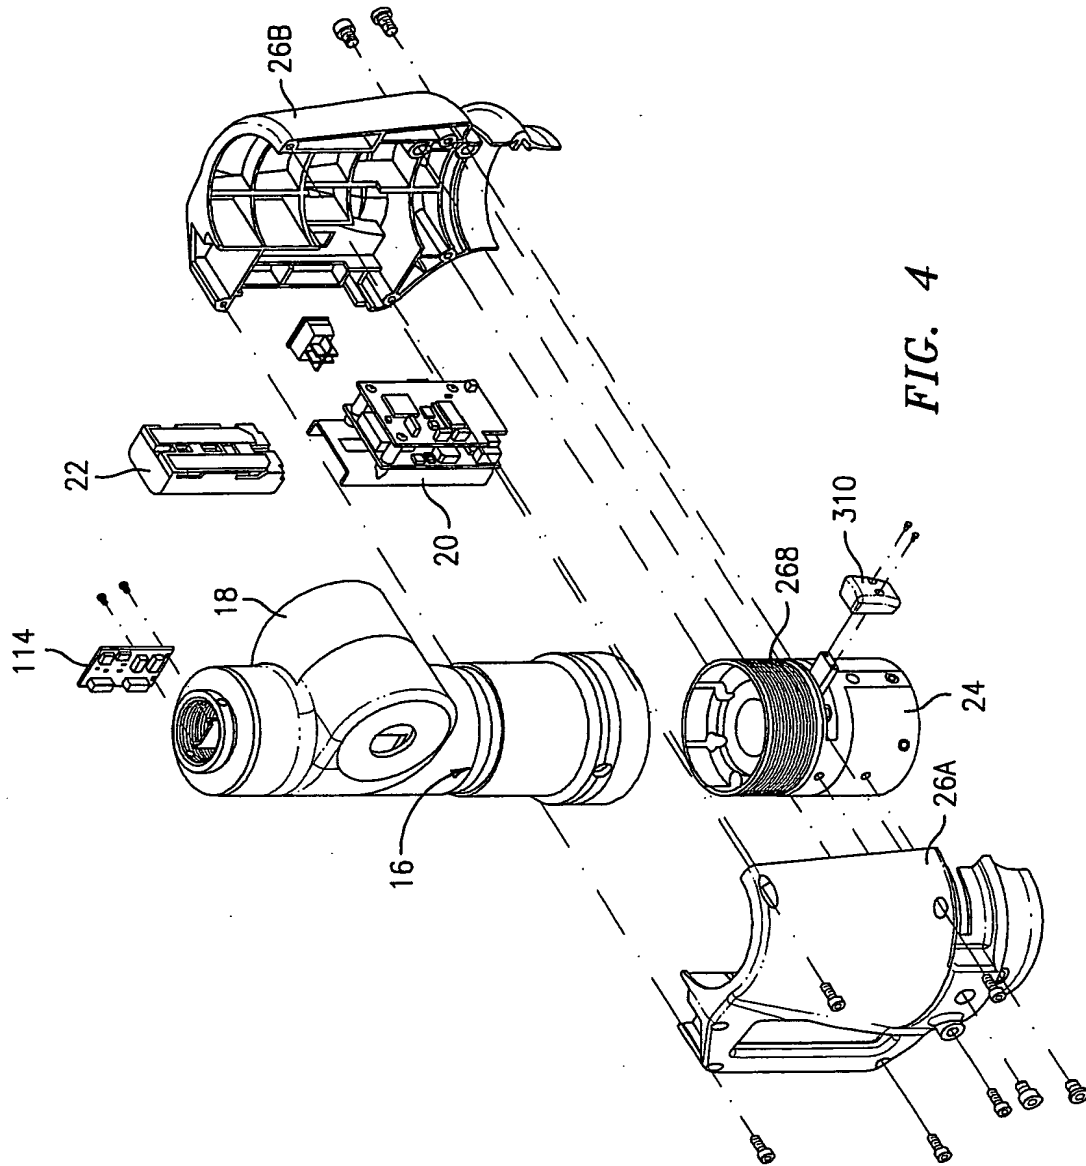


FIG. 4

6/47 50

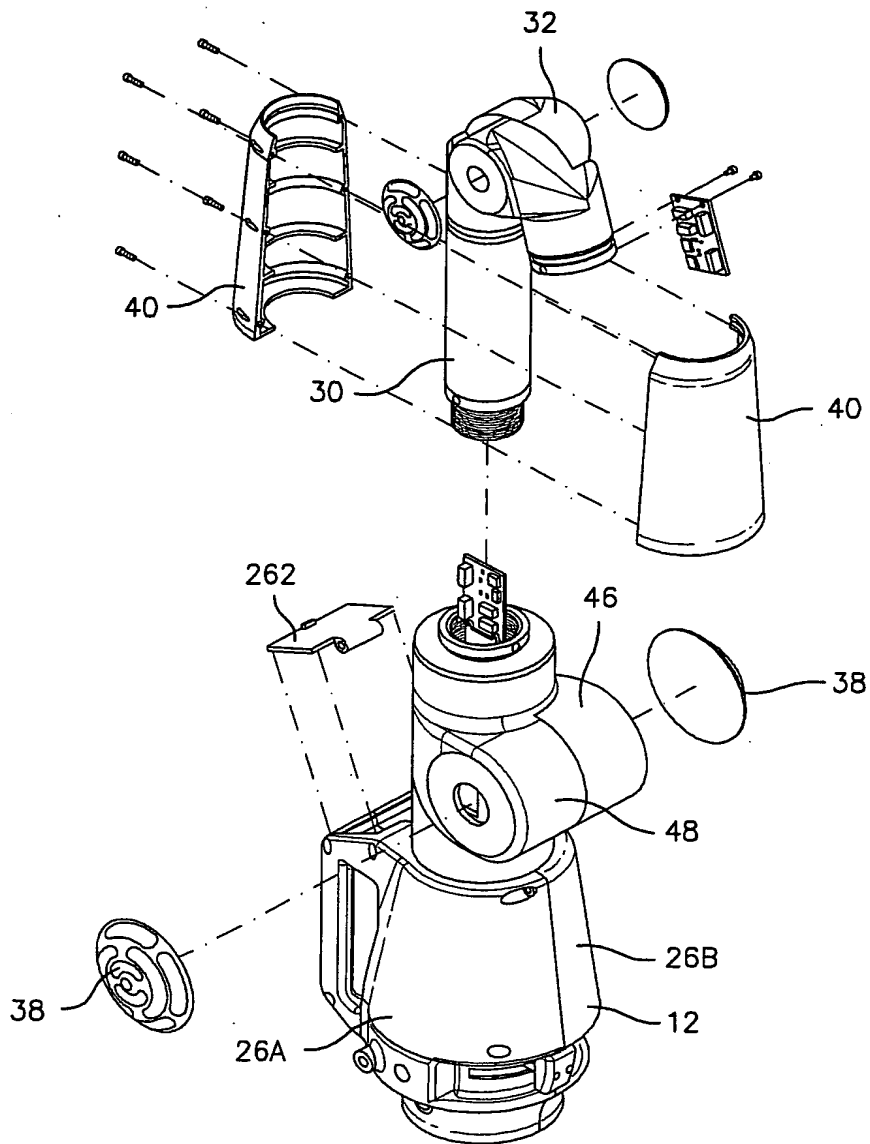


FIG. 5

7147 50

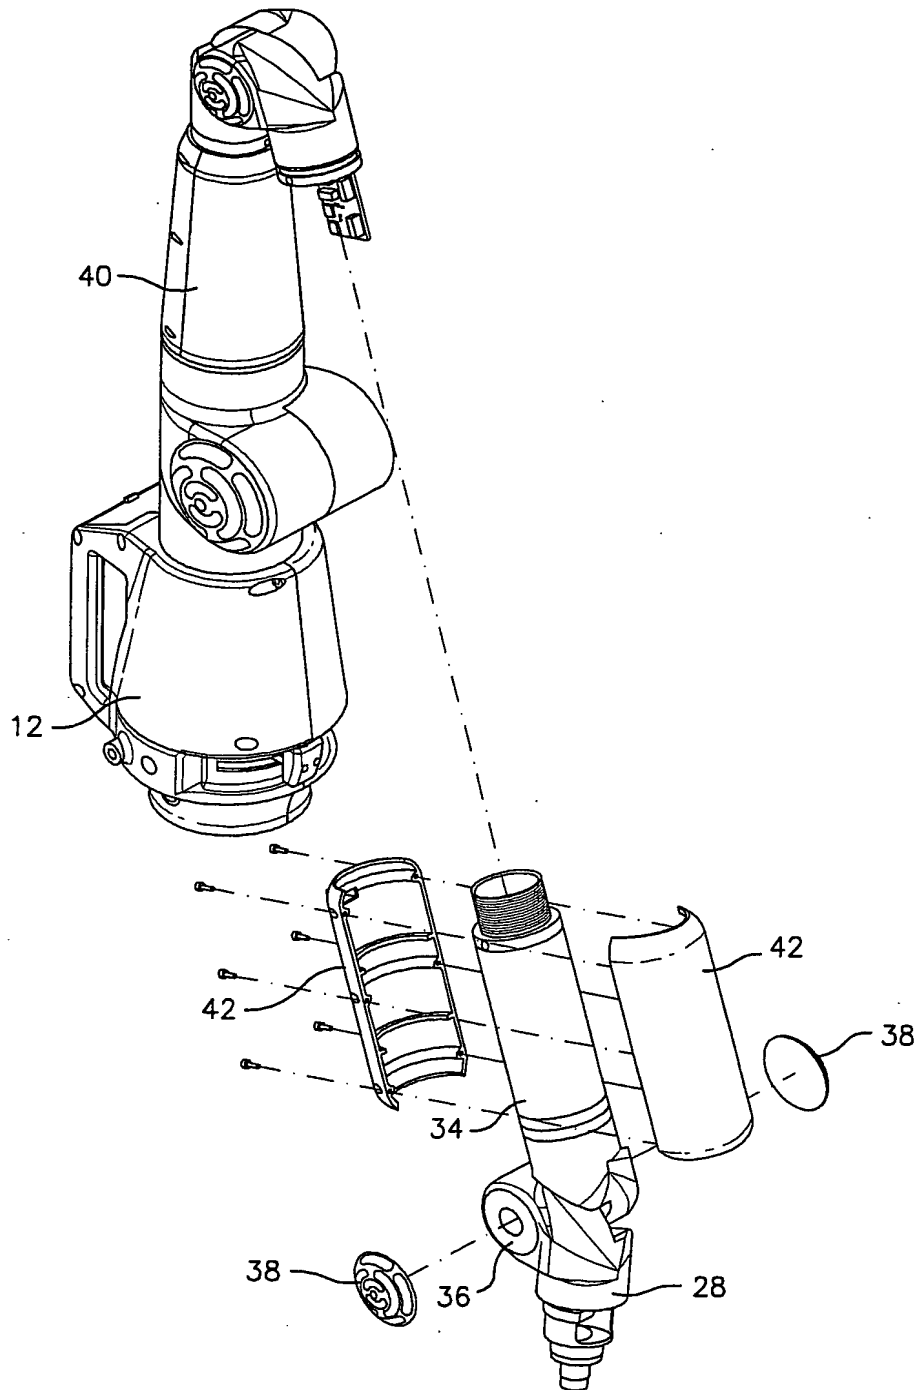


FIG. 6

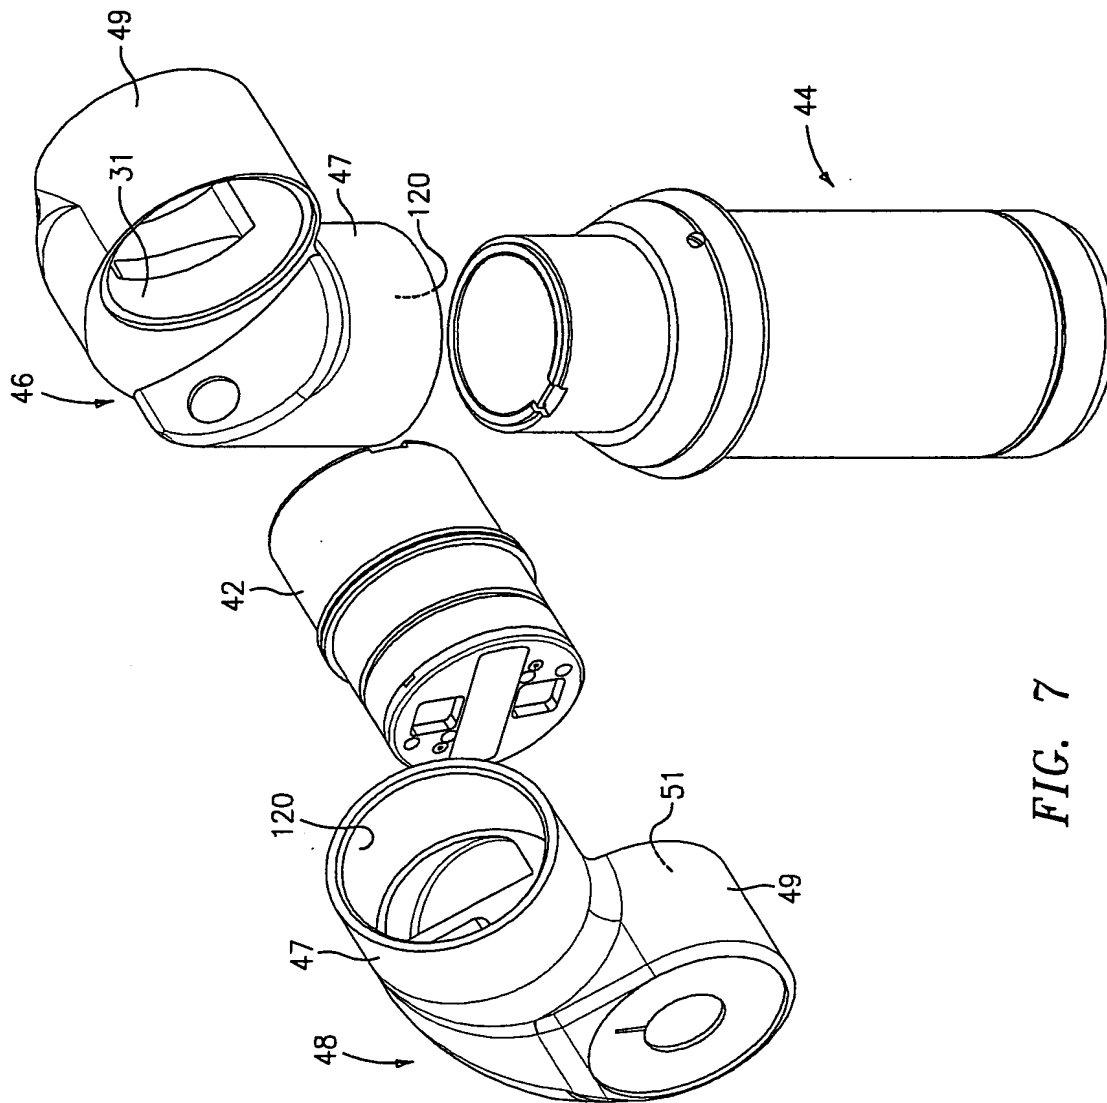


FIG. 7

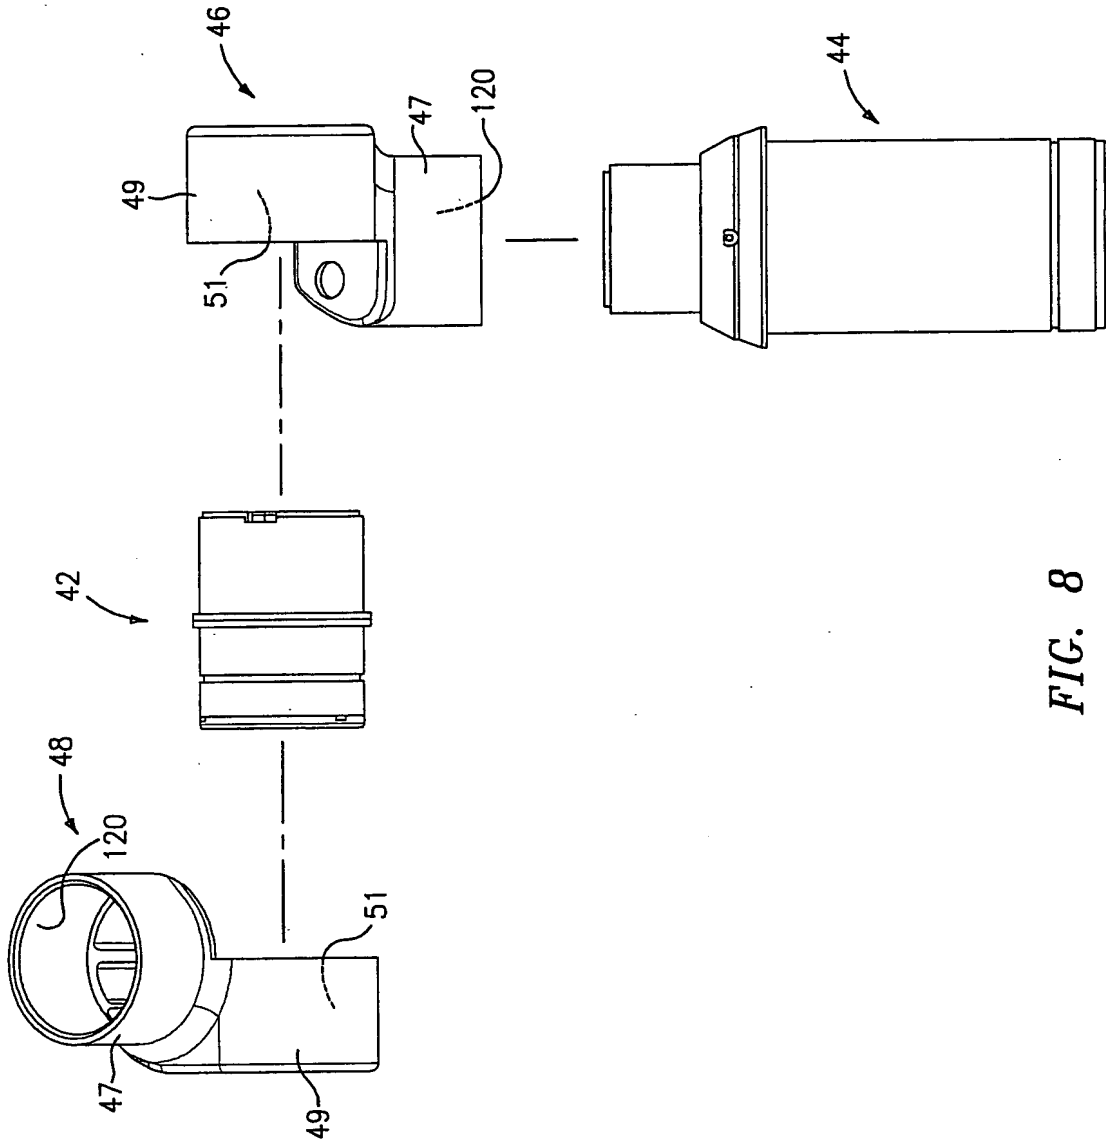


FIG. 8

10/47 SU

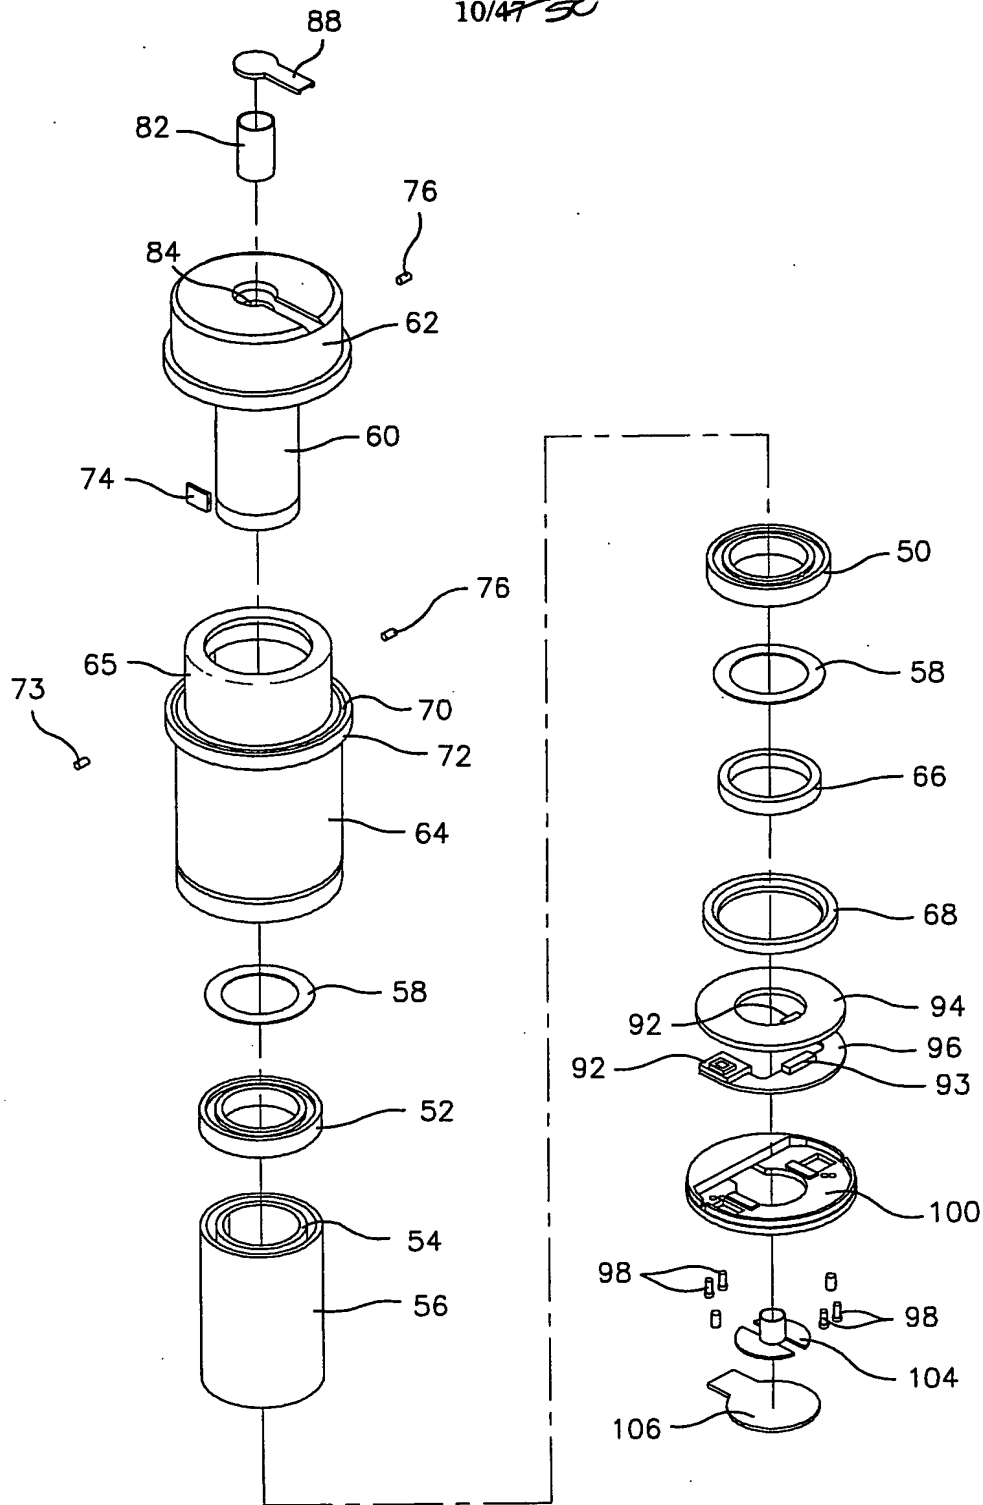
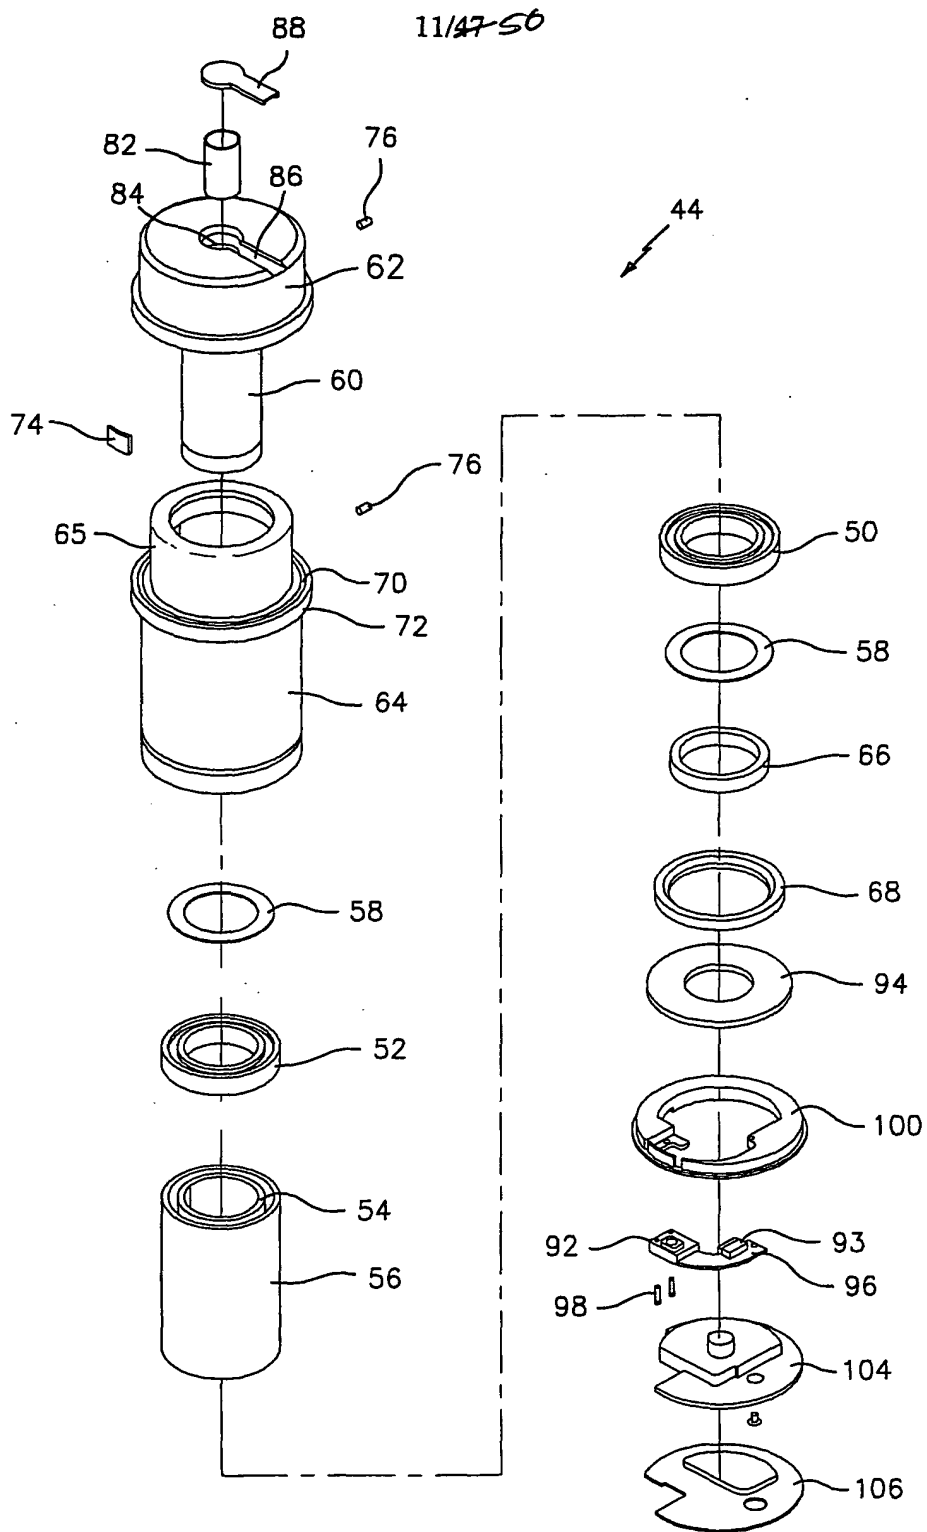


FIG. 9



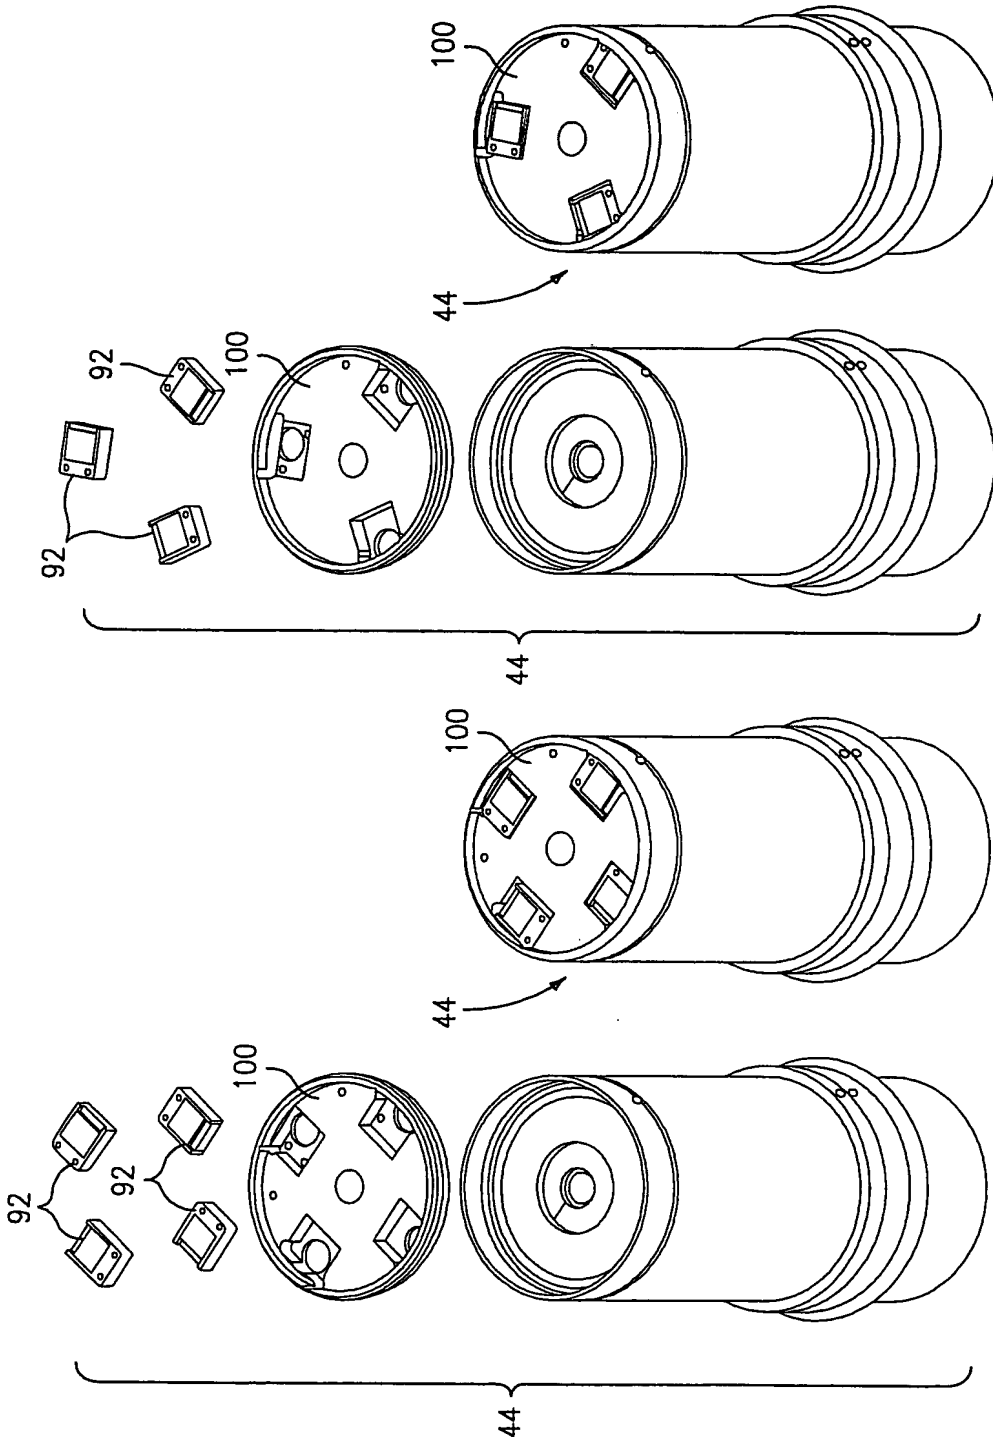


FIG. 9E

FIG. 9D

FIG. 9C

FIG. 9B

1347 50

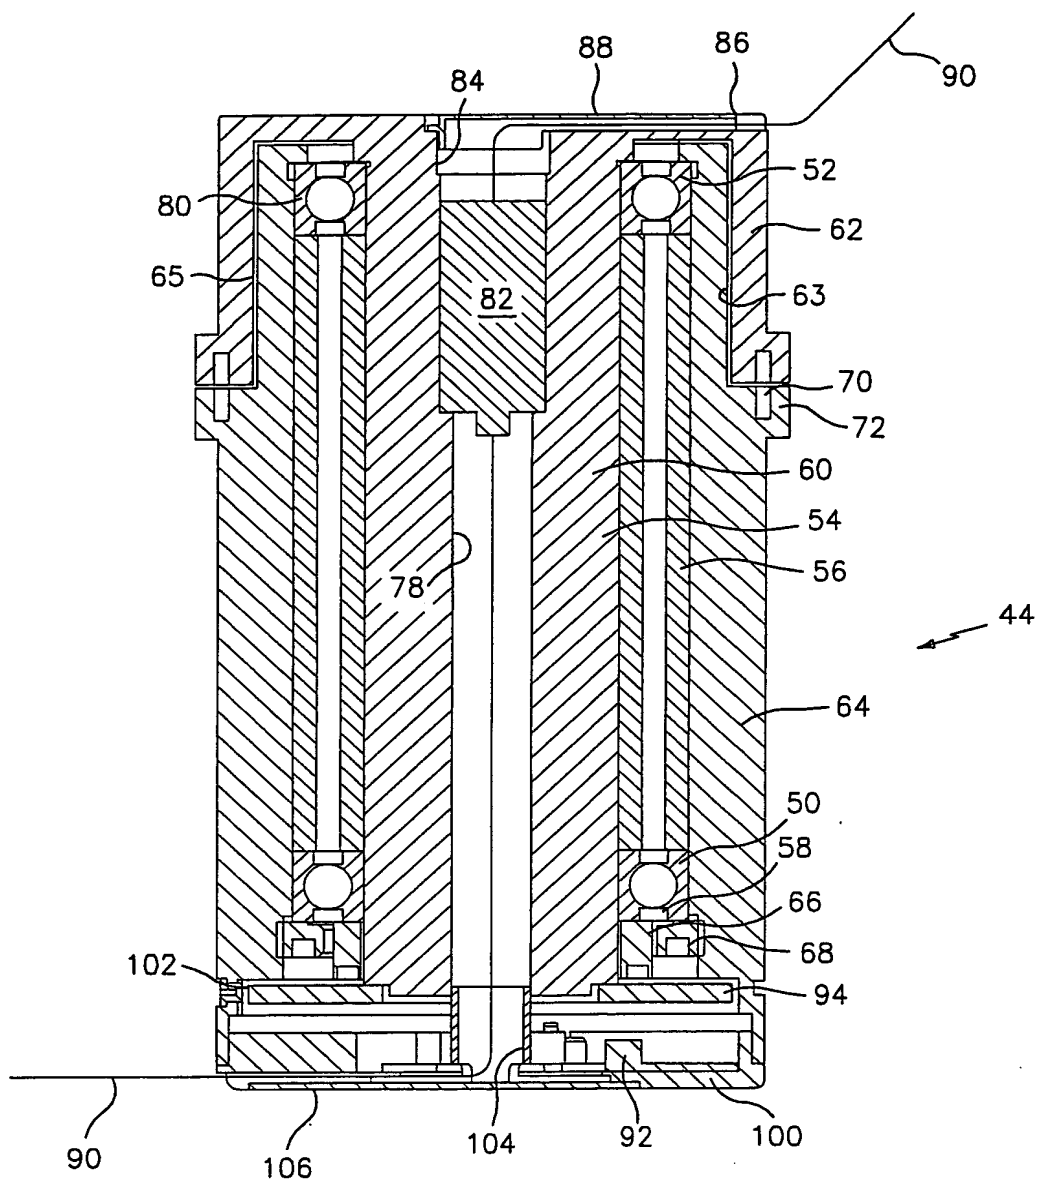


FIG. 10

14/47 50

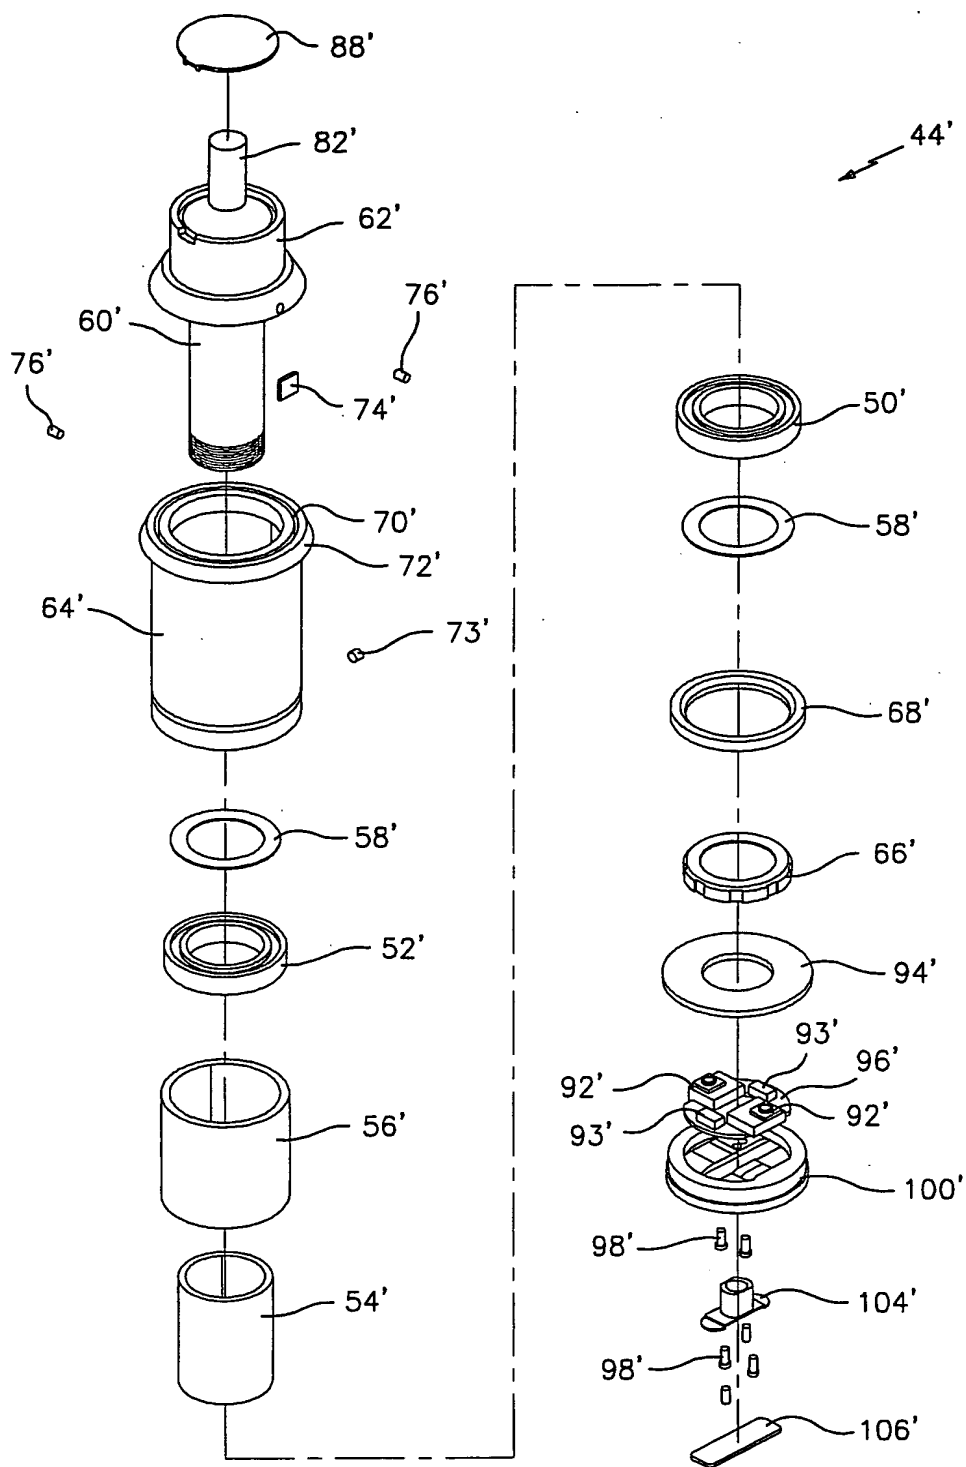


FIG. 11

15/47 SU

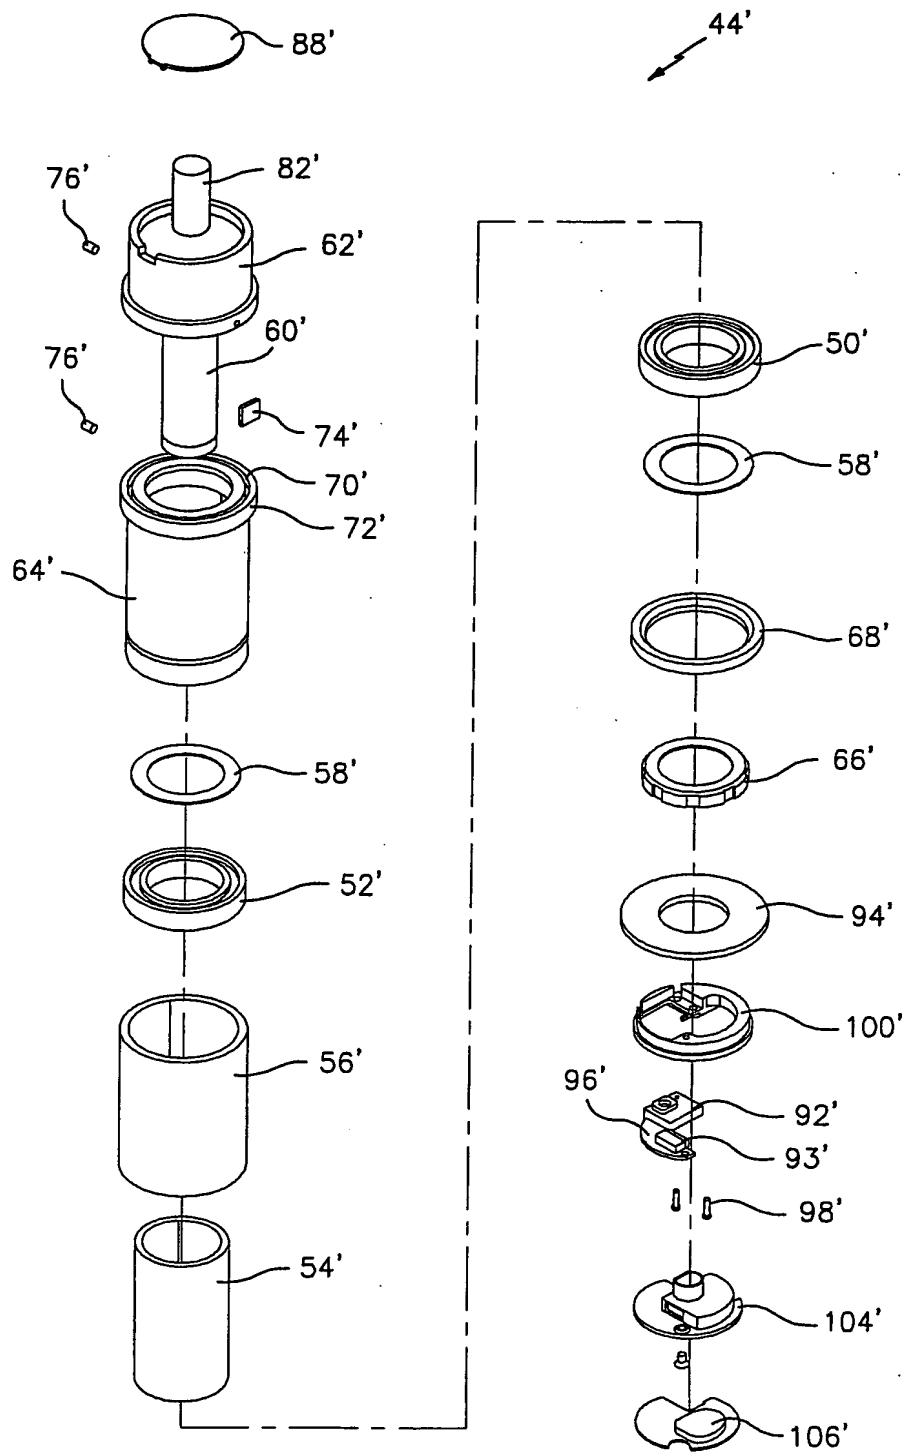


FIG. 11A

164750

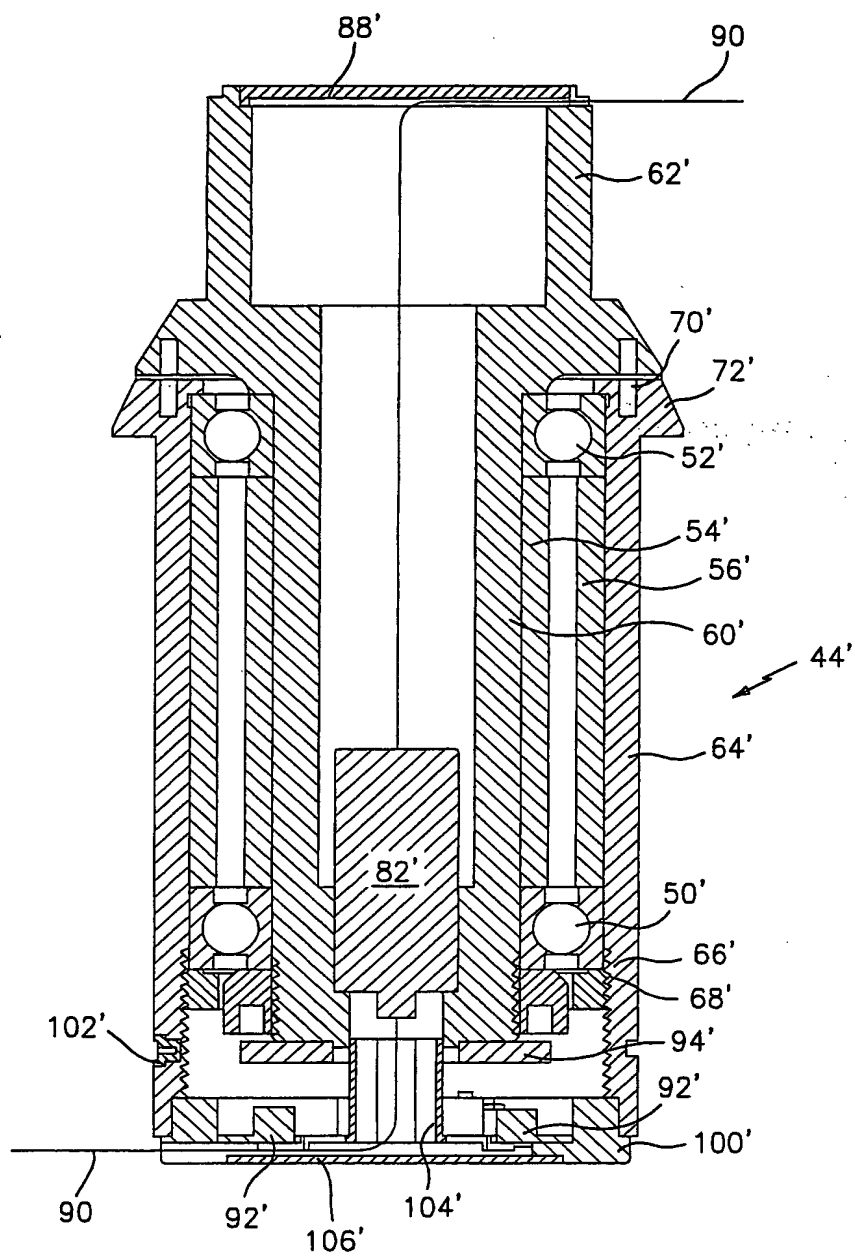


FIG. 12

17/47-50

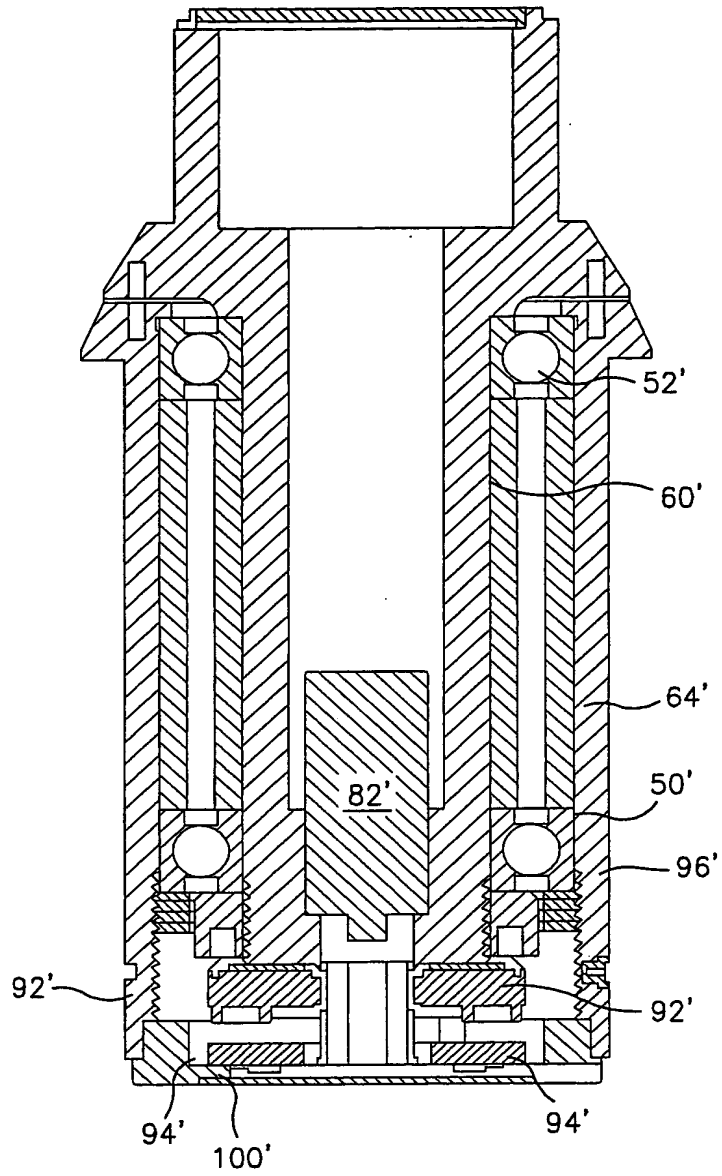


FIG. 12A

18/47 50

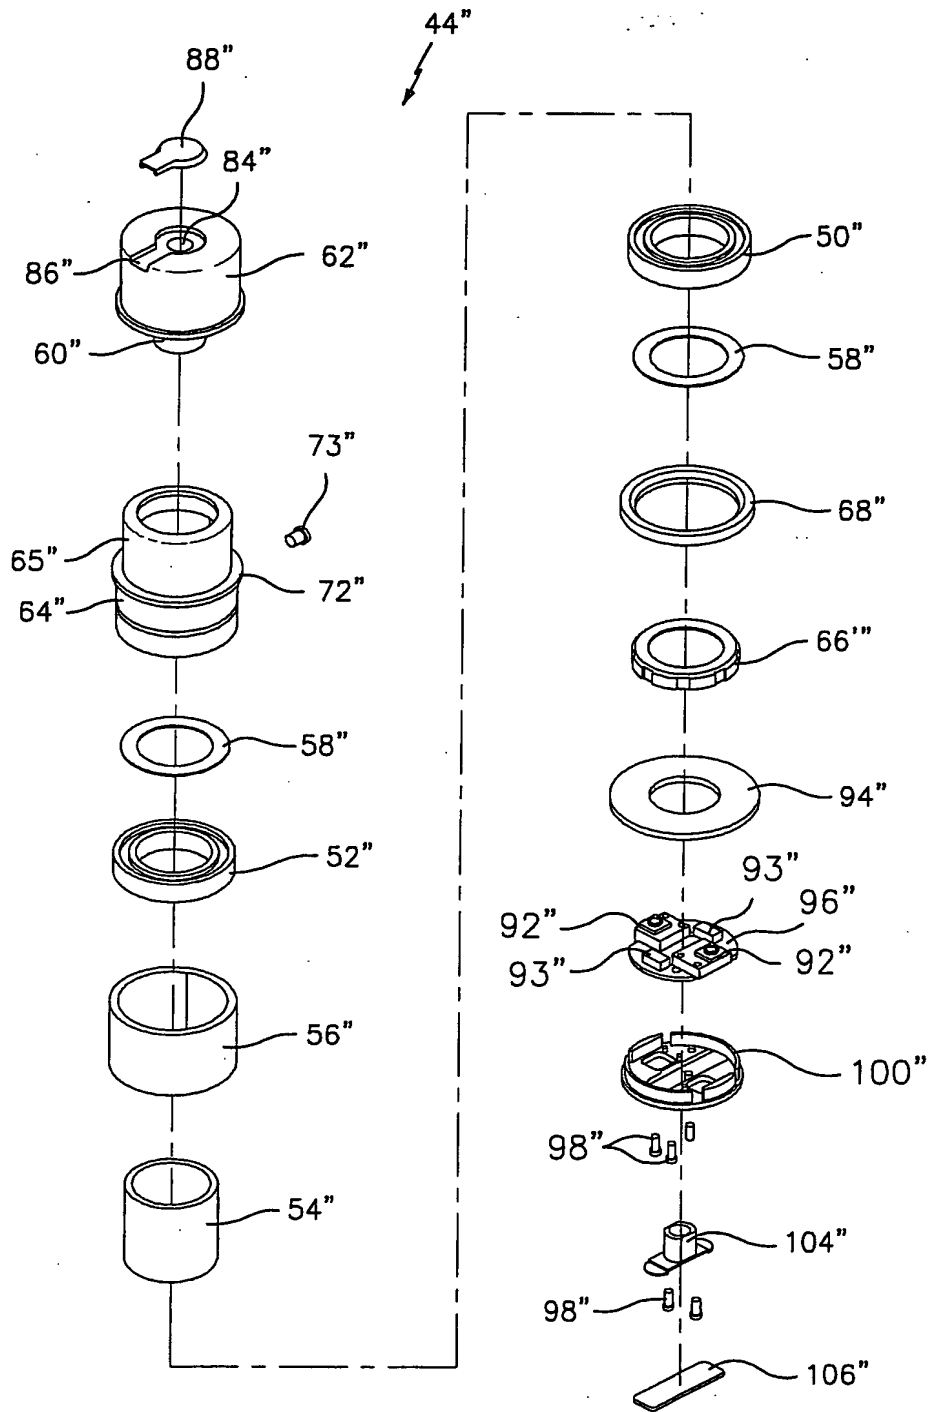


FIG. 13

19/4750

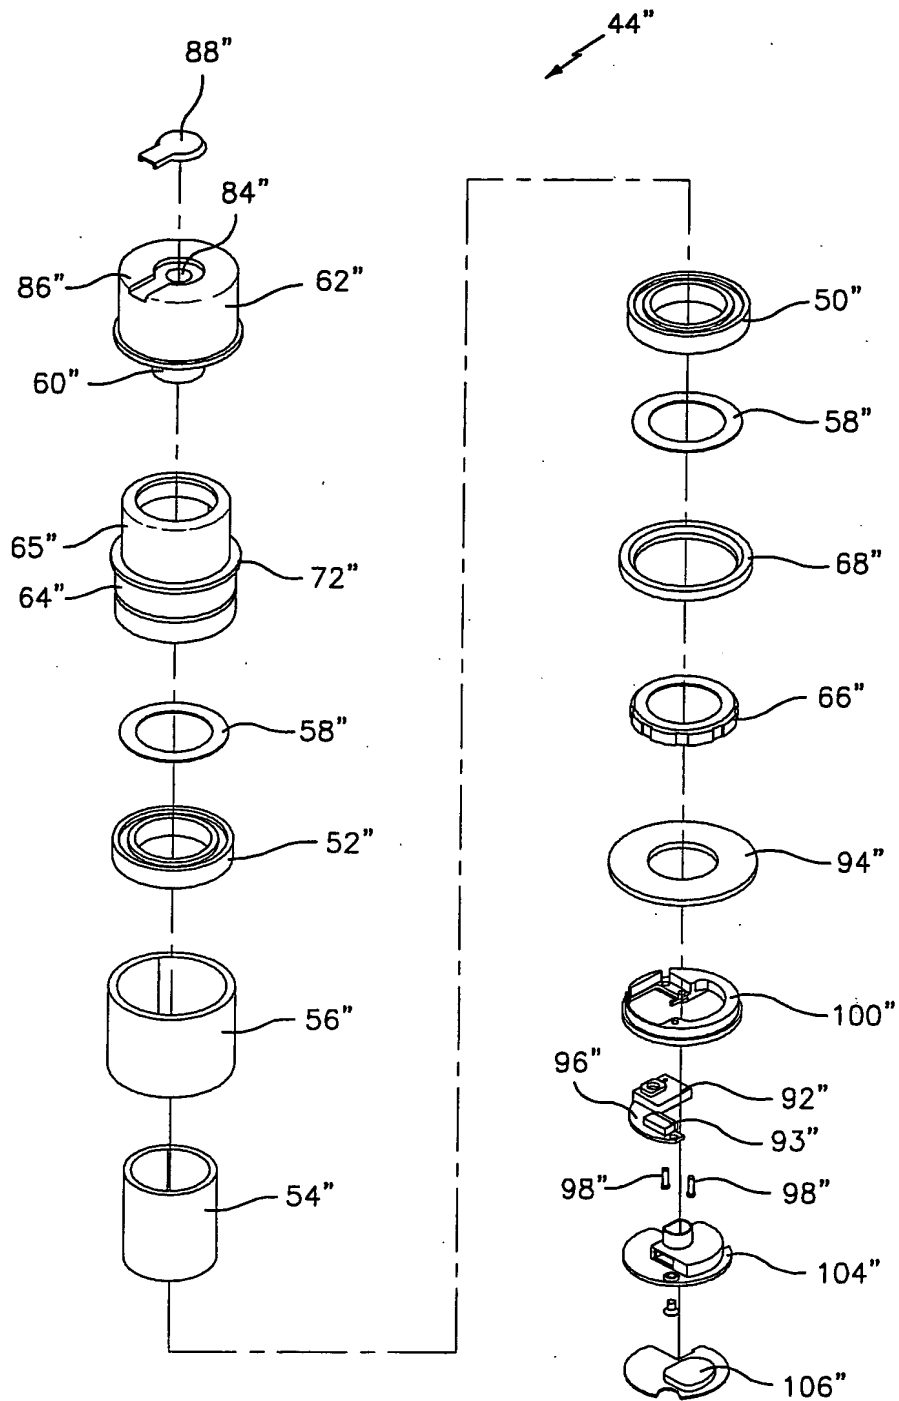


FIG. 13A

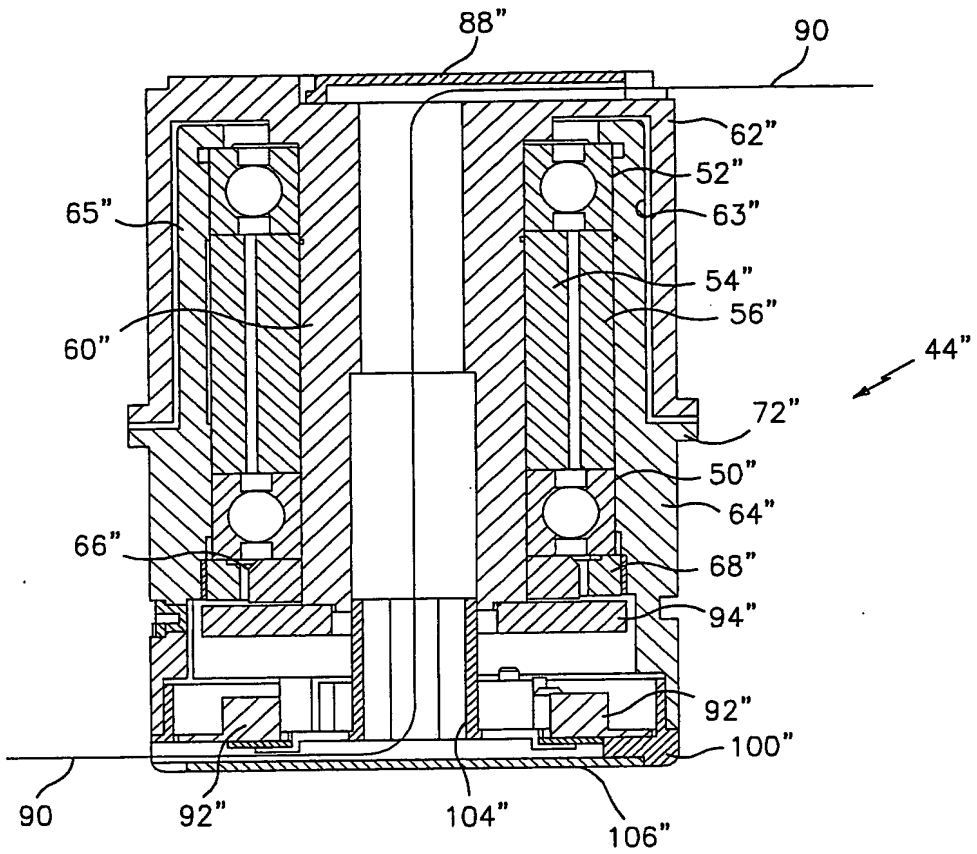


FIG 14

21/47 ED

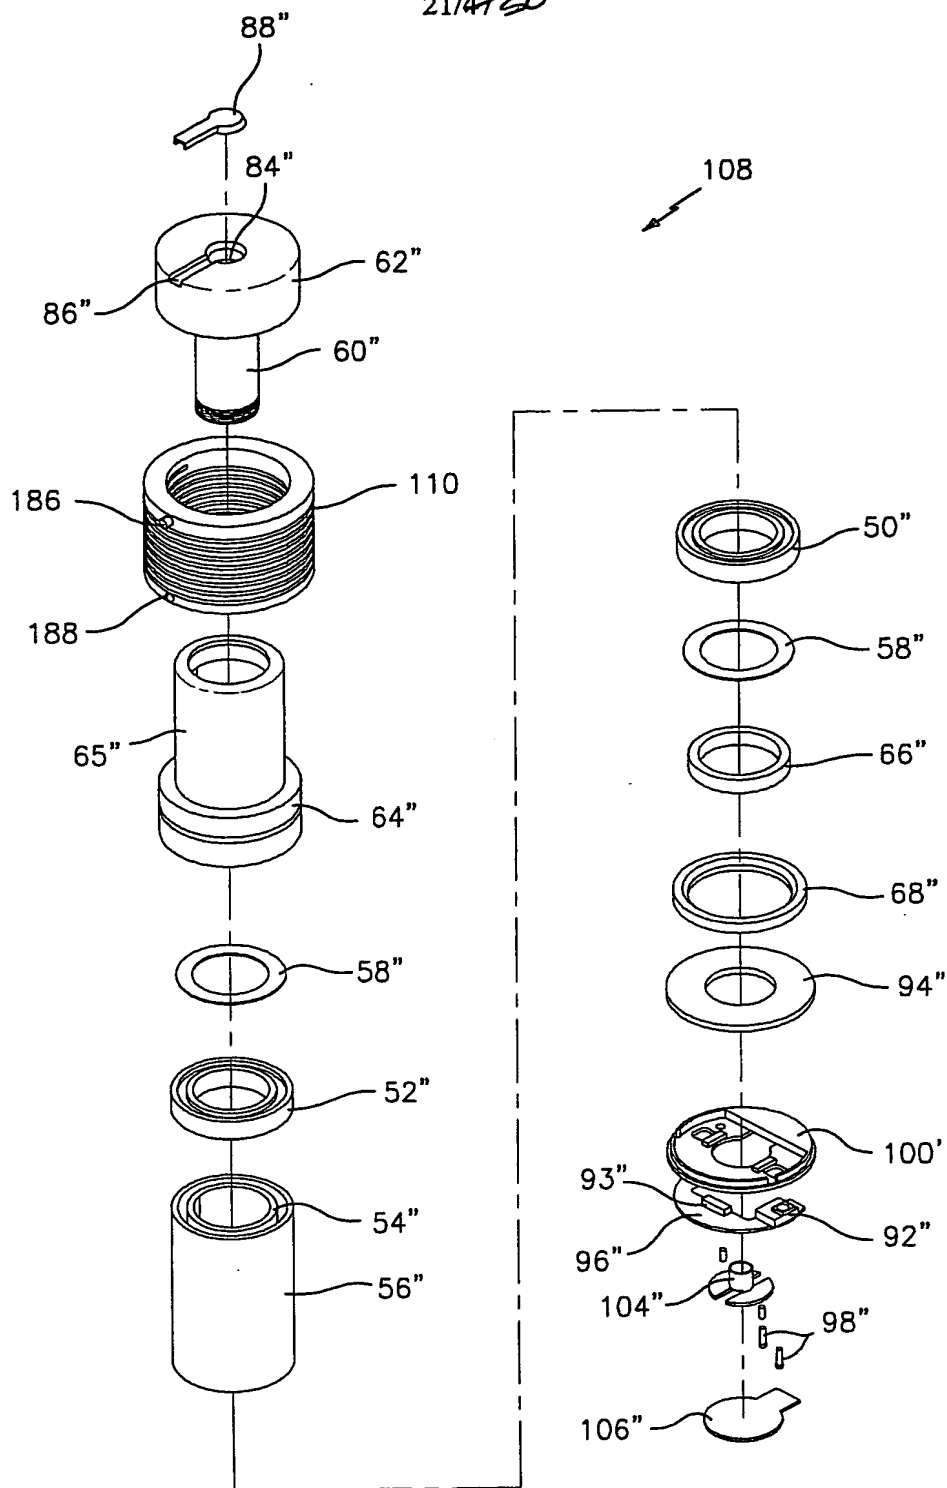


FIG. 15

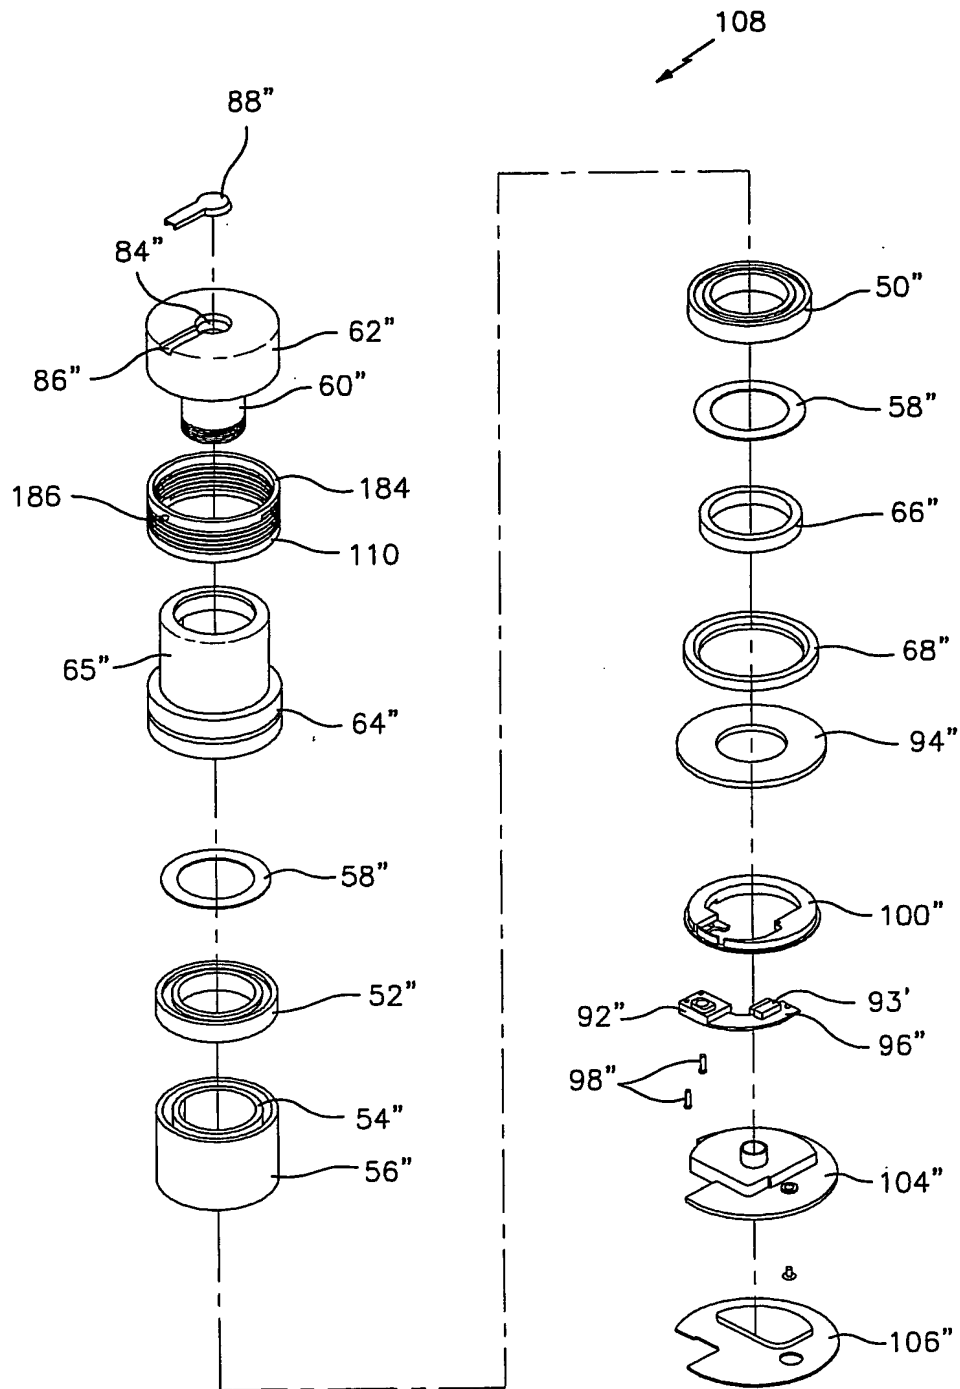


FIG. 15A

23/4750

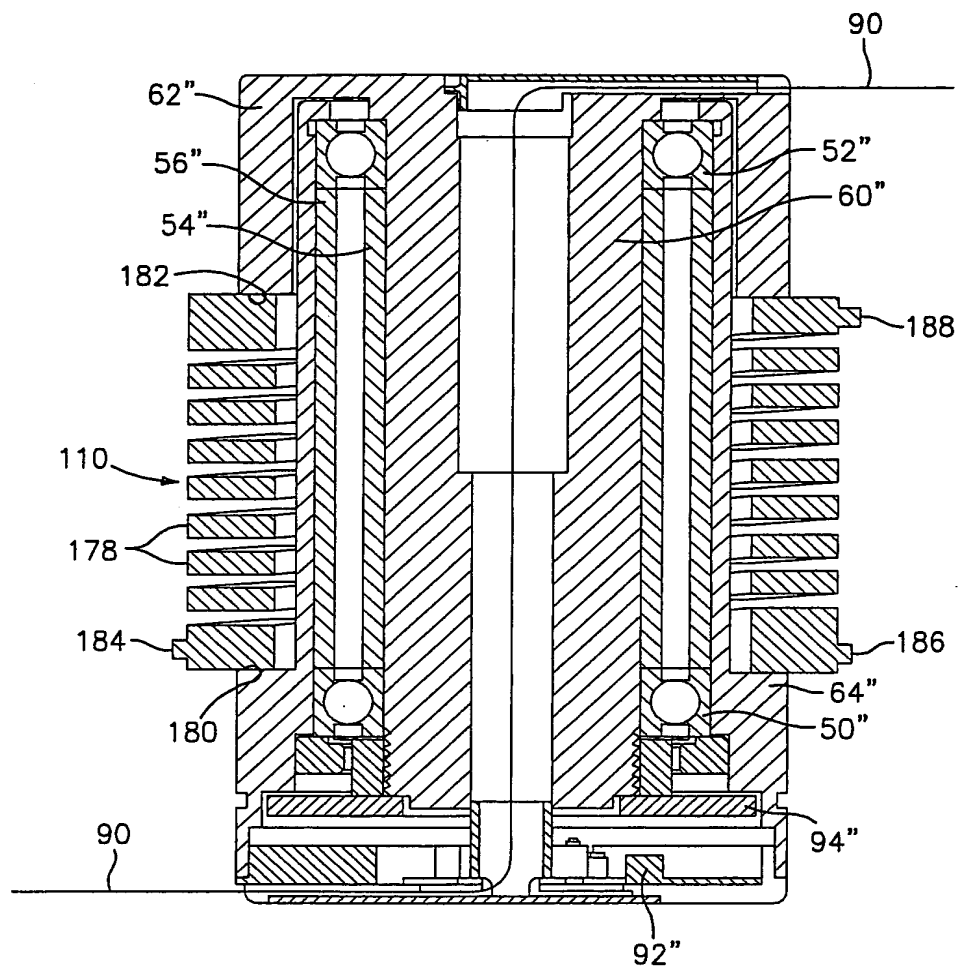


FIG. 16

24/4750

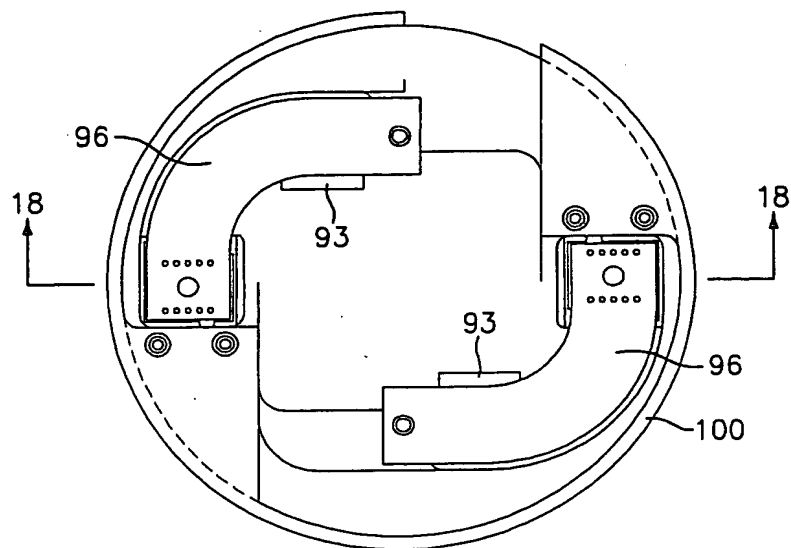


FIG. 17

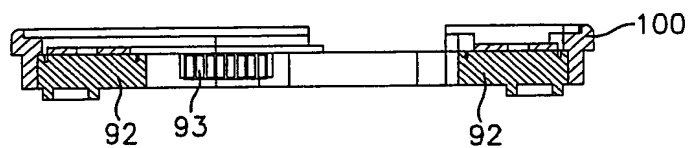


FIG. 18

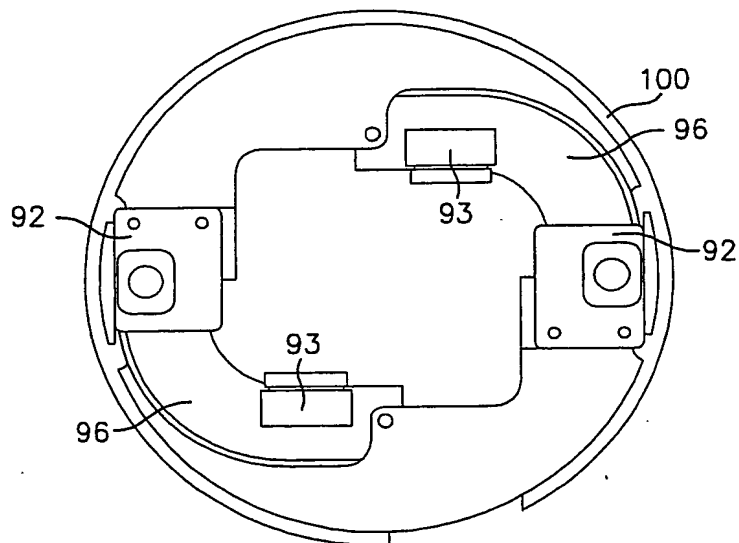


FIG. 19

25/47 20

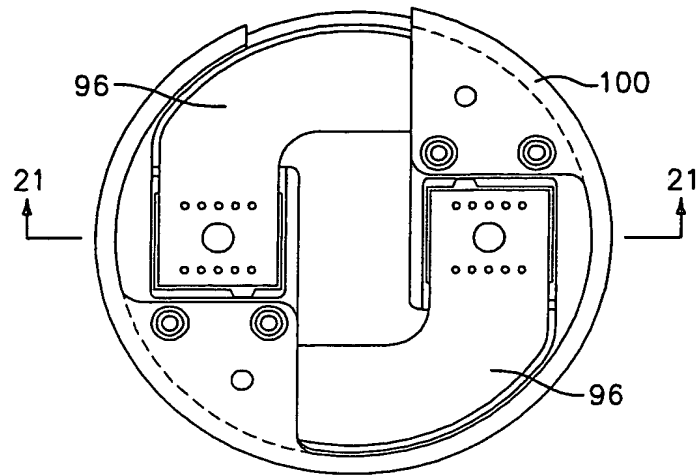


FIG. 20

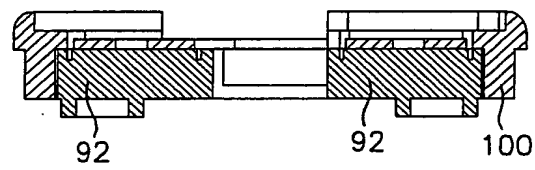


FIG. 21

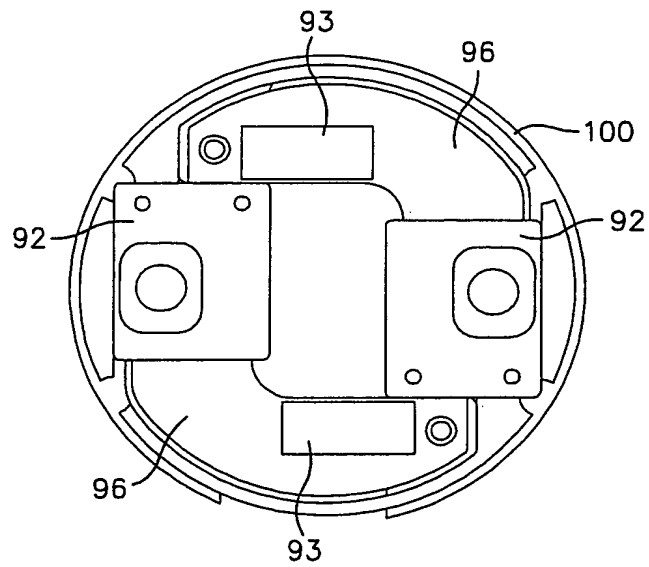


FIG. 22

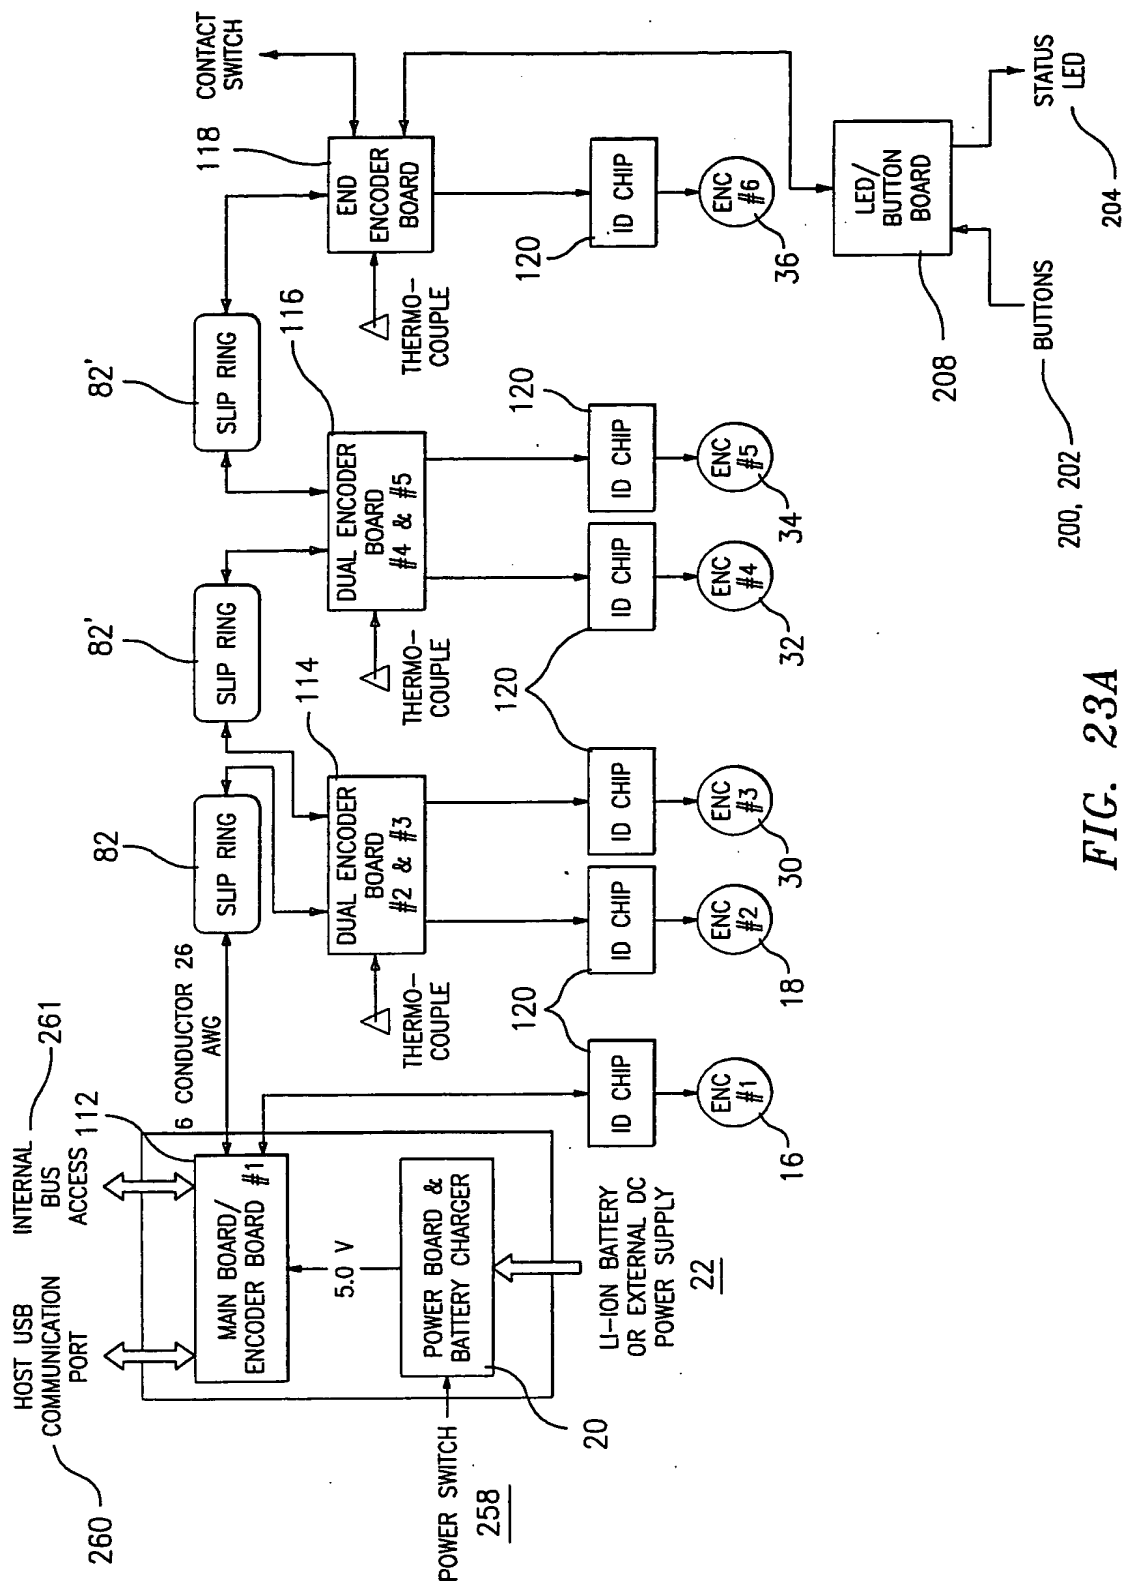


FIG. 23A

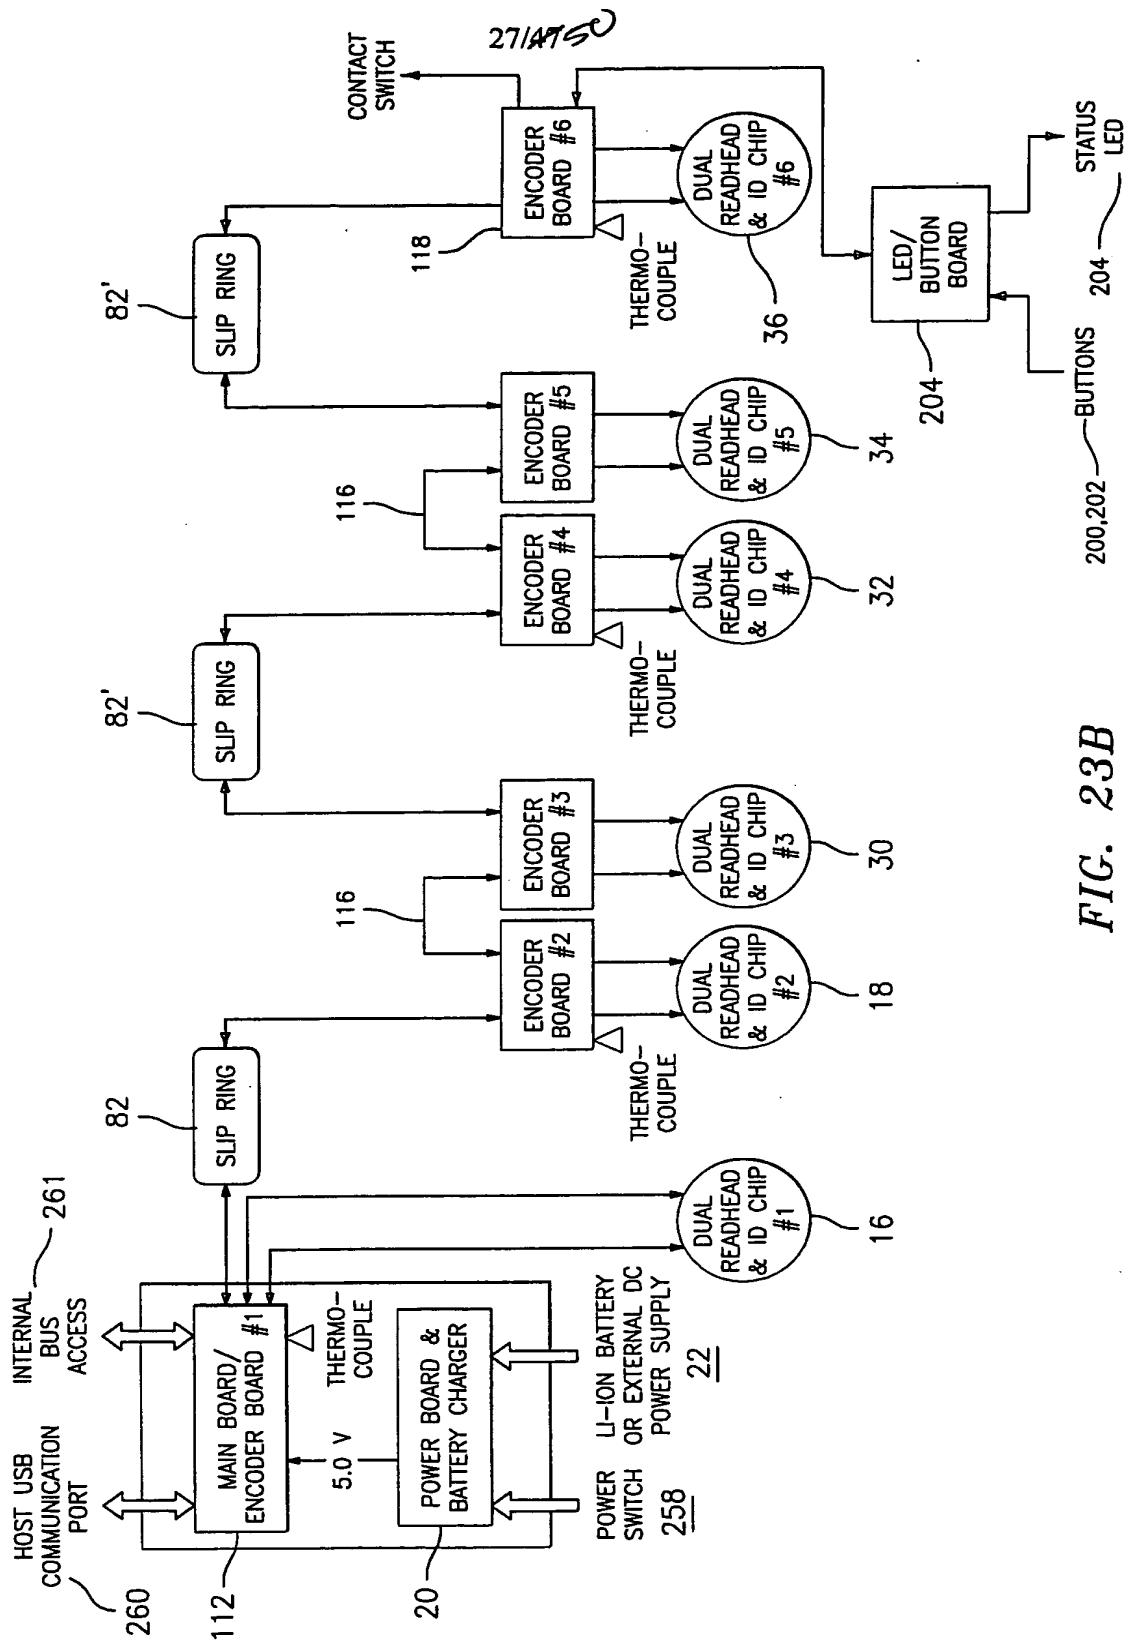


FIG. 23B

28/47 50

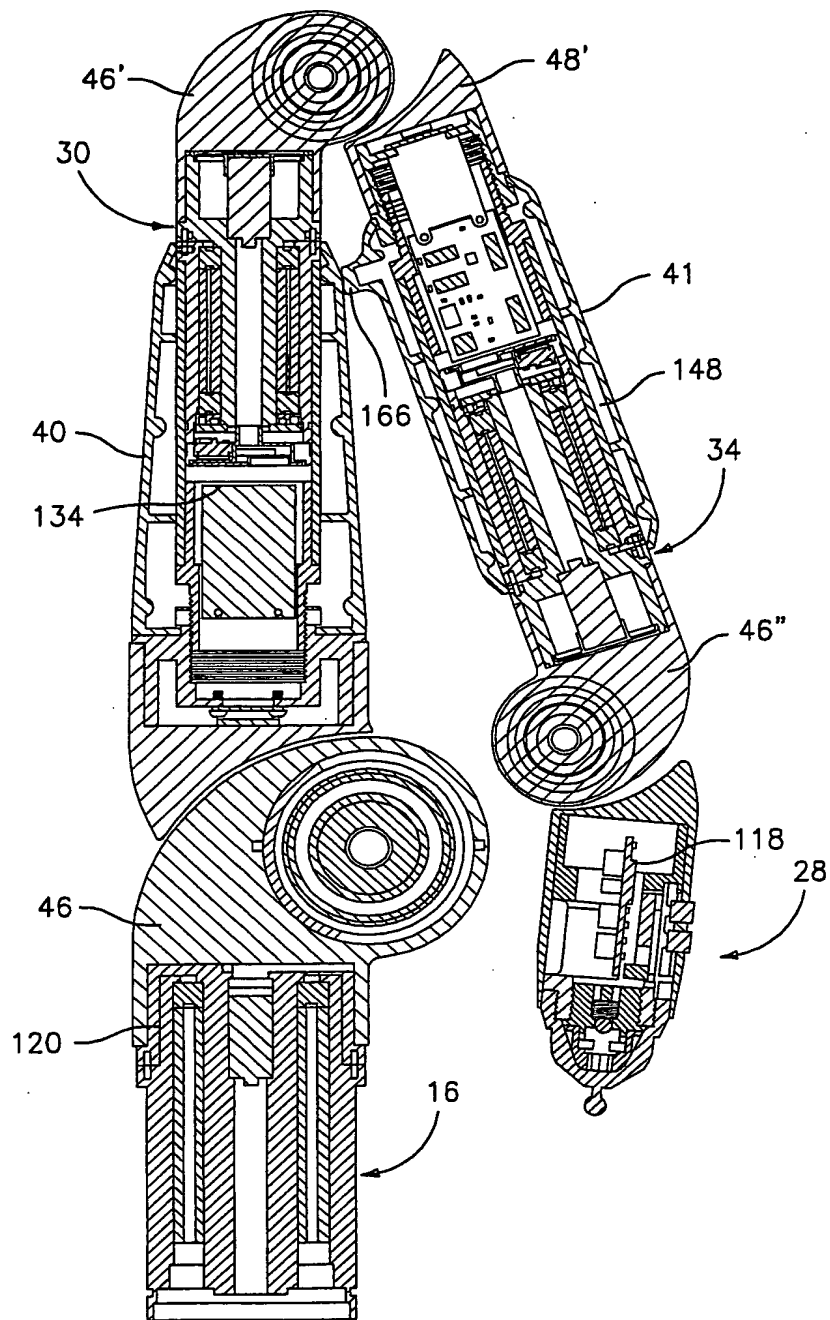


FIG. 24

29/47 50

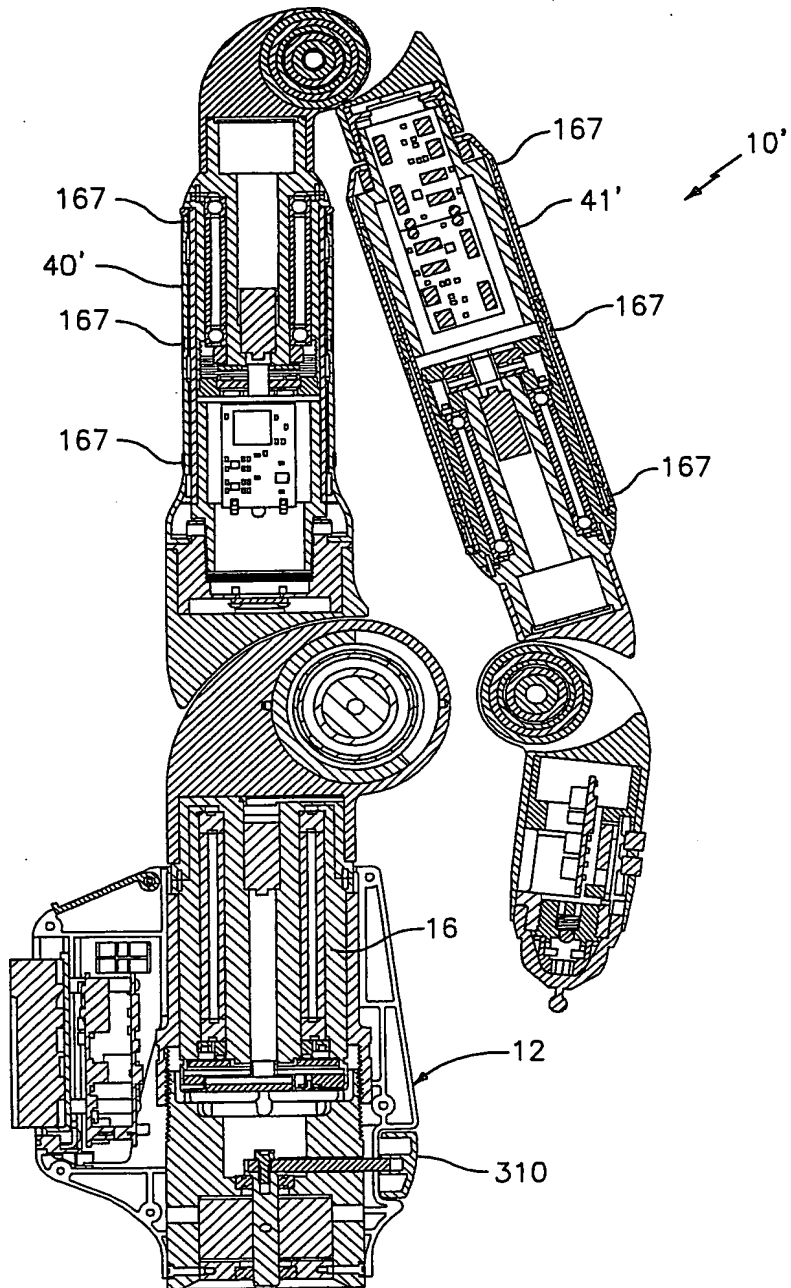


FIG. 24A

30/4750

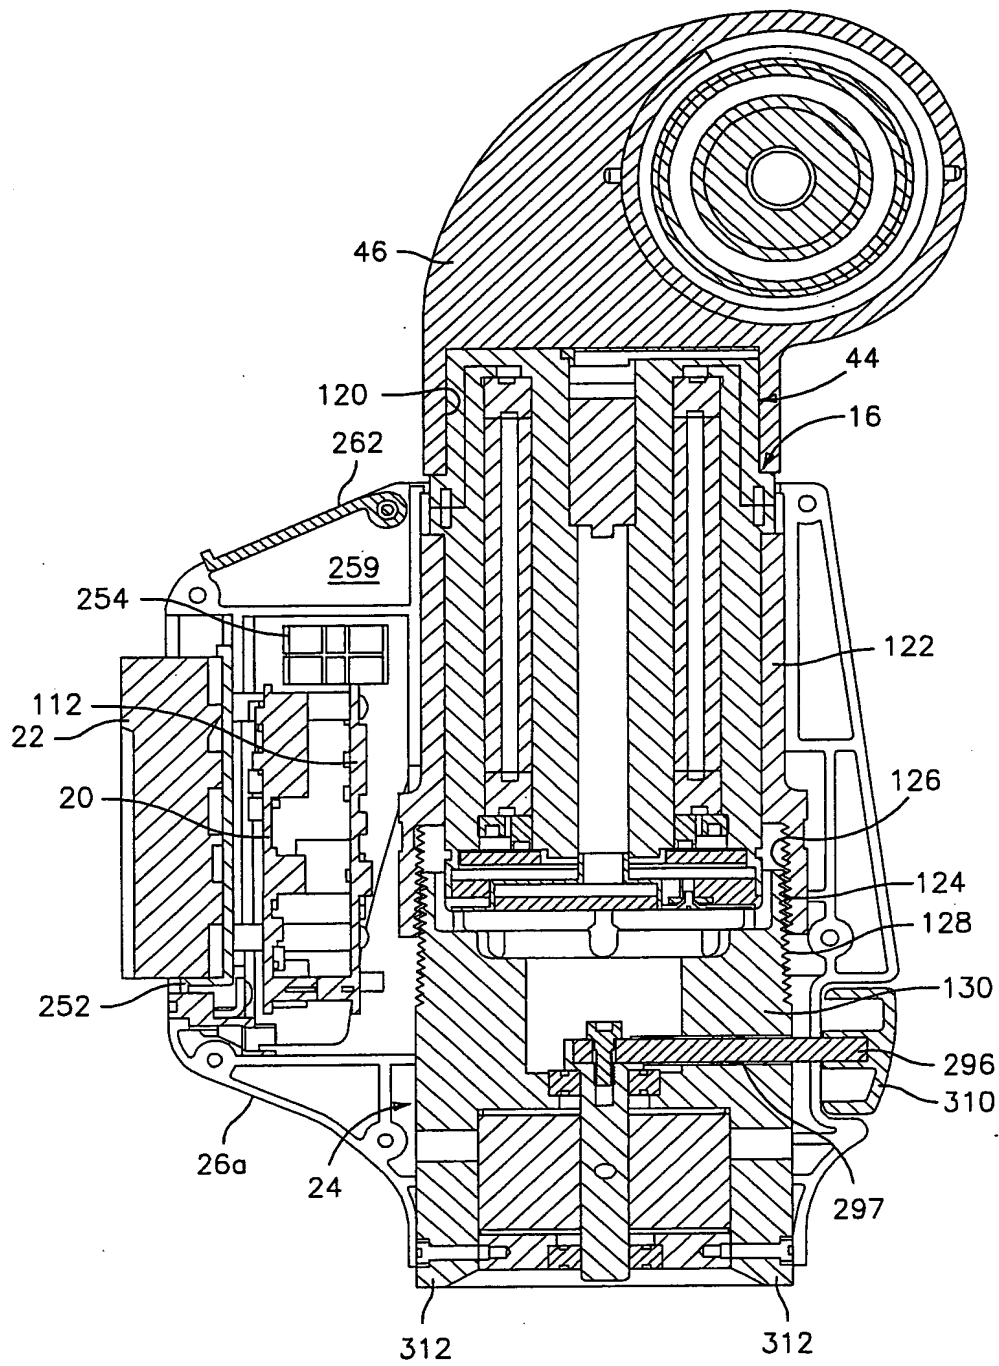


FIG. 25

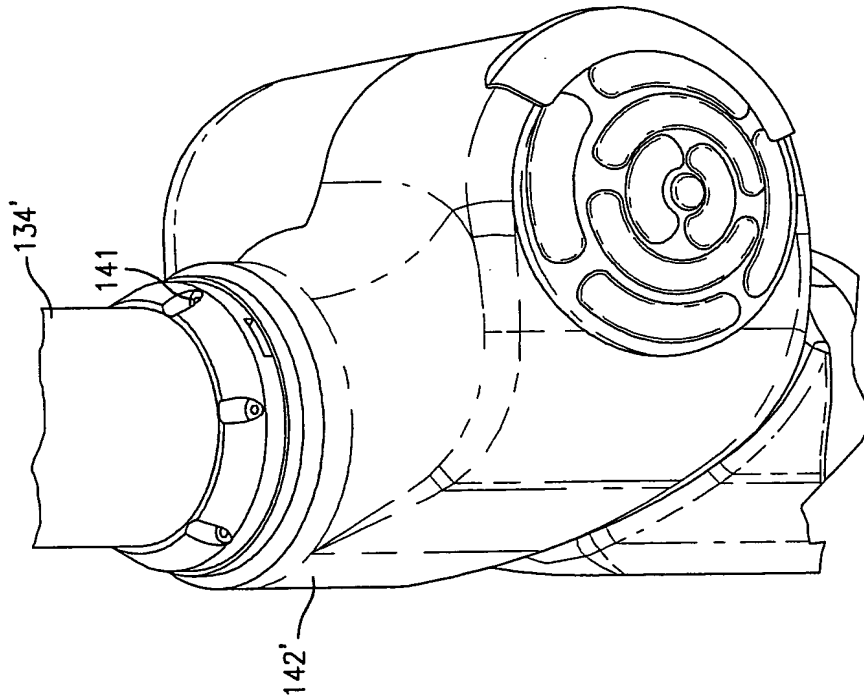


FIG. 25A

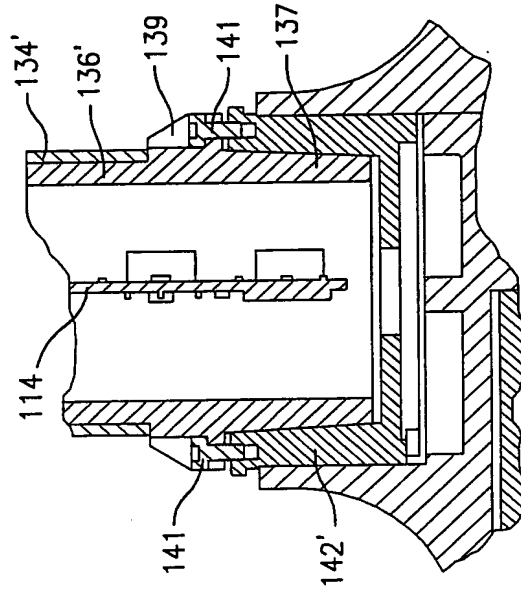


FIG. 25B

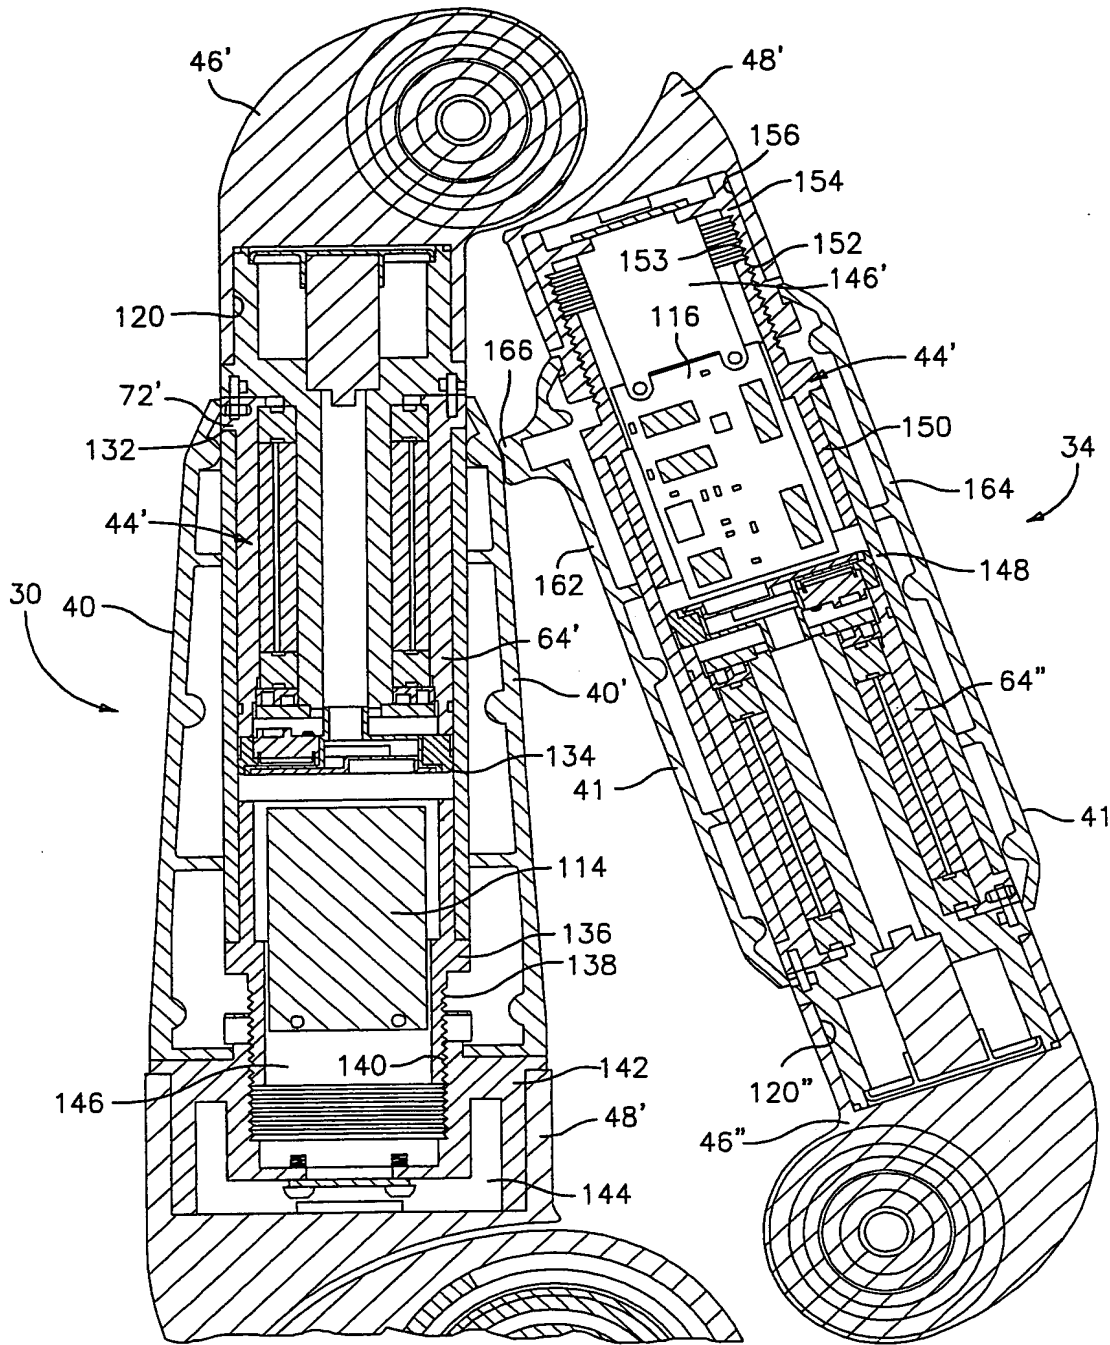


FIG. 26

33/4750

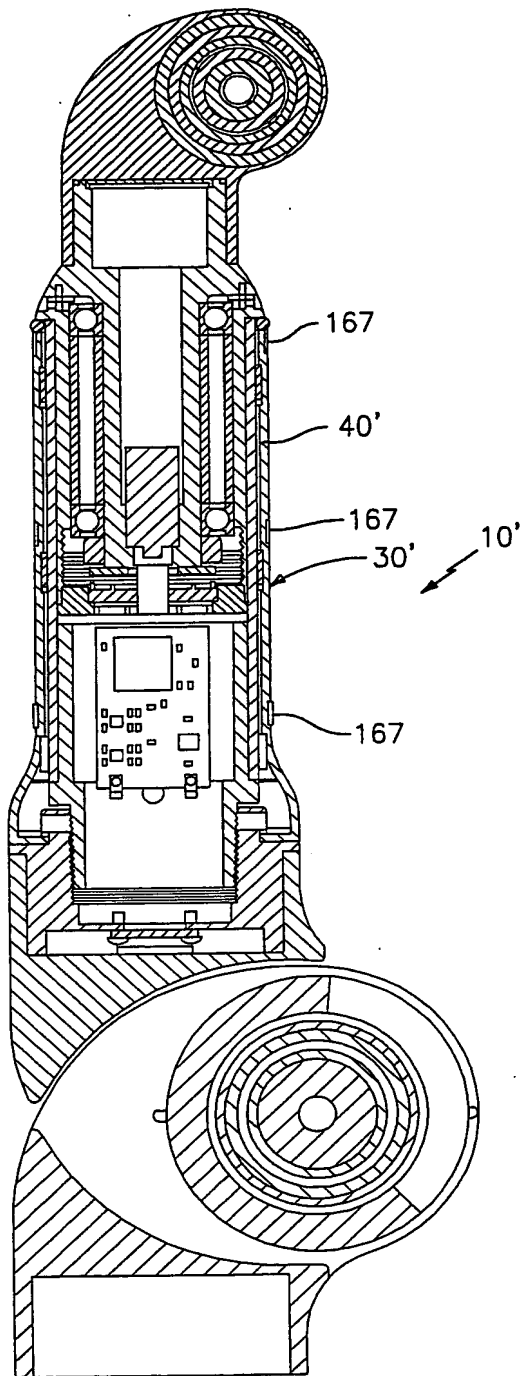


FIG. 26A

34/4750

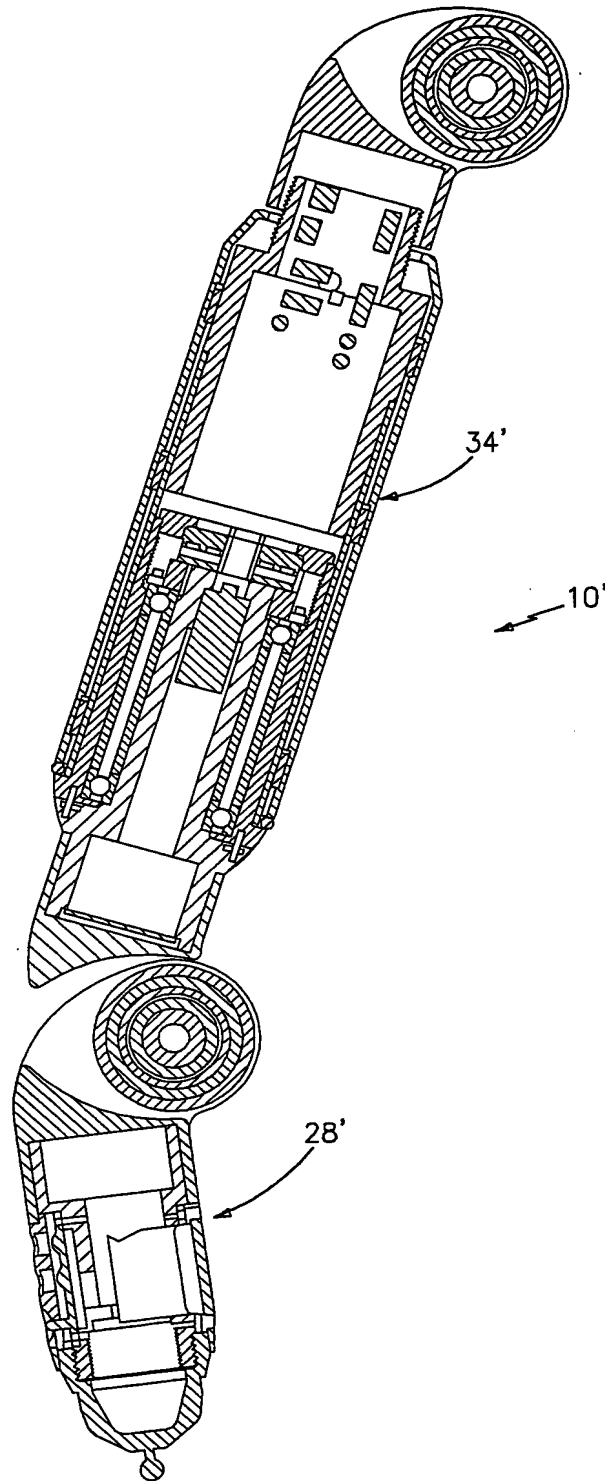


FIG. 26B

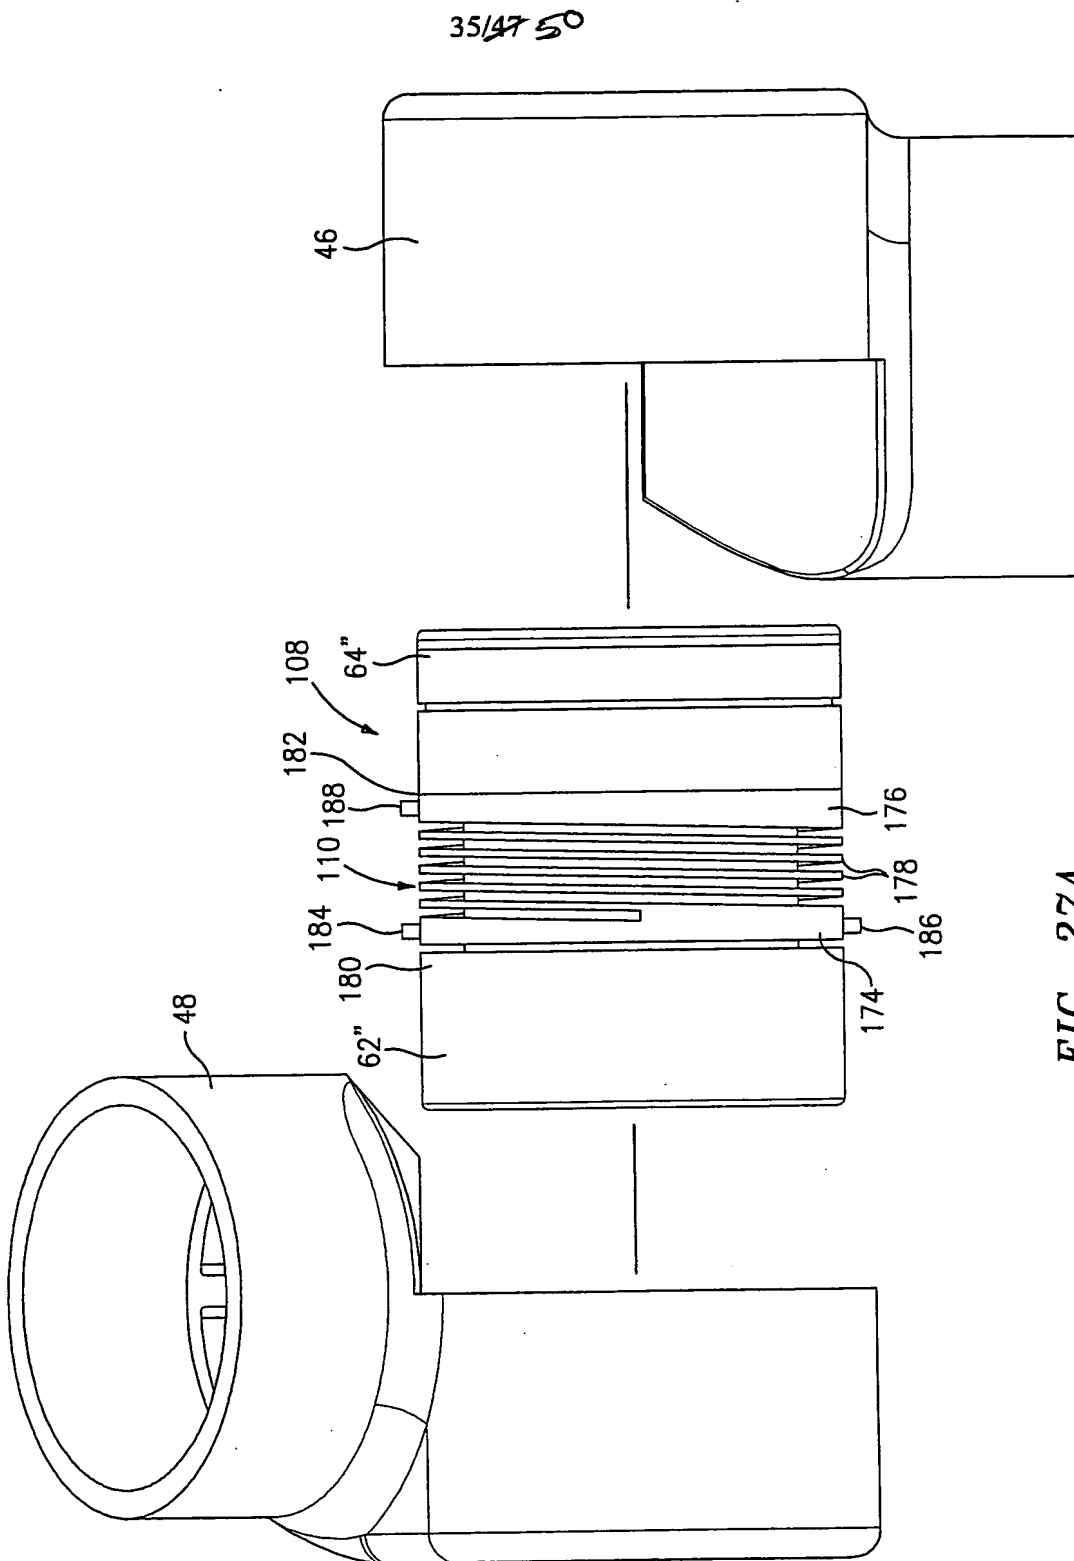


FIG. 27A

36/4750

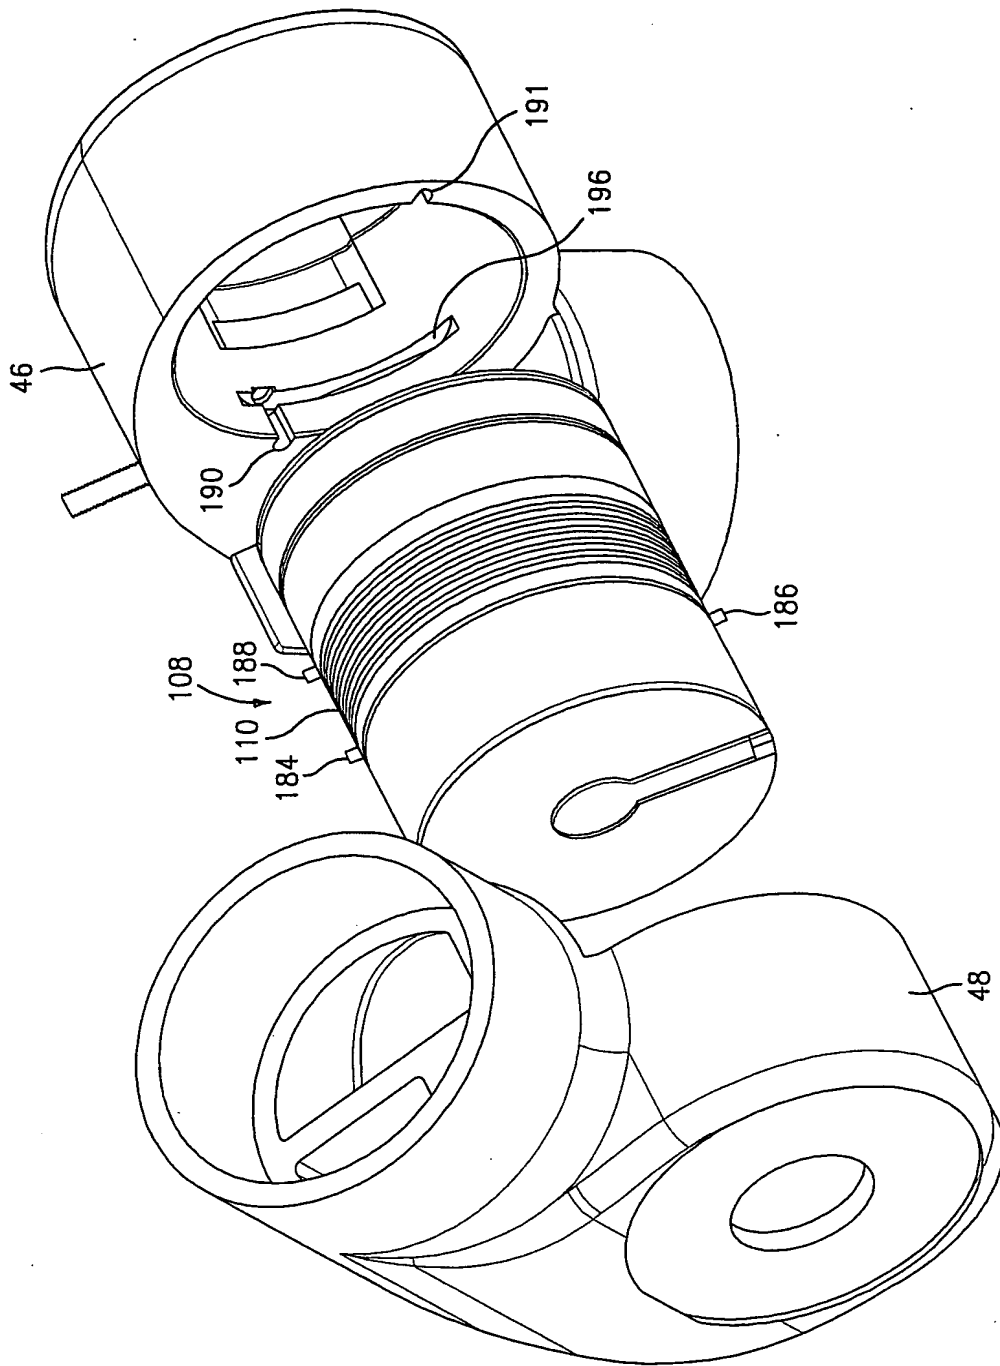


FIG. 27B

3714750

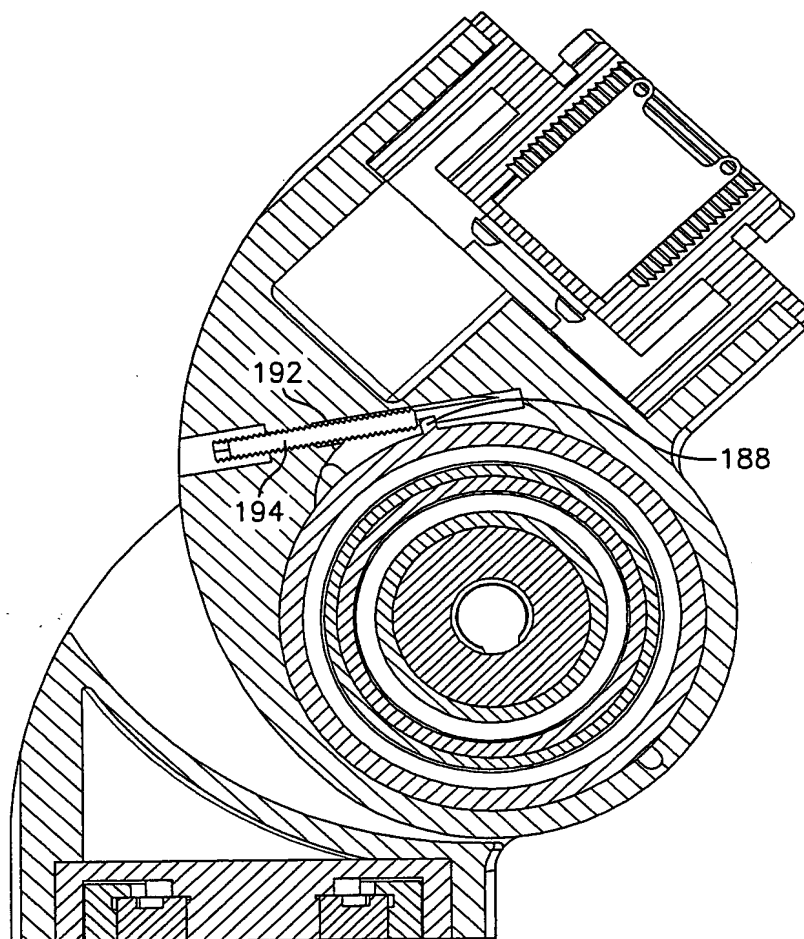


FIG. 28

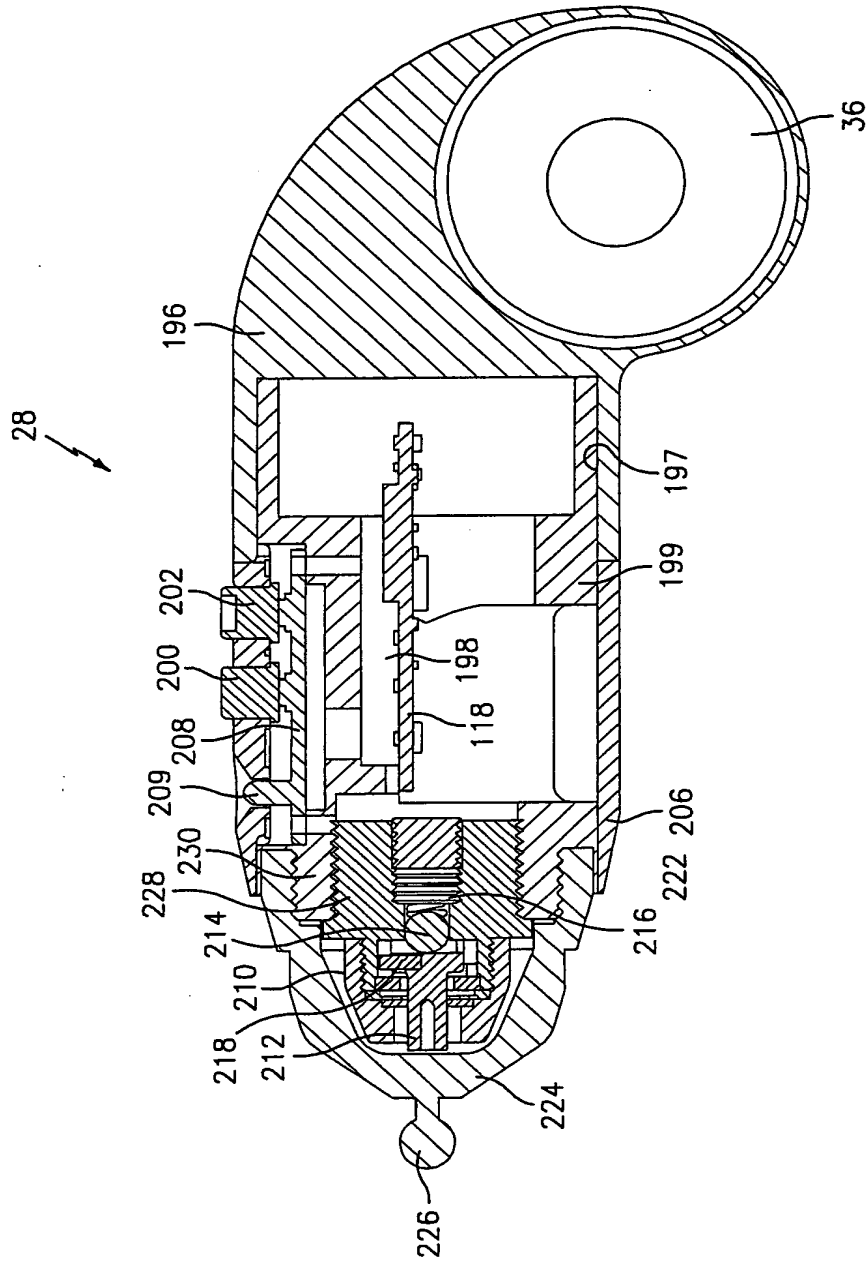


FIG. 29

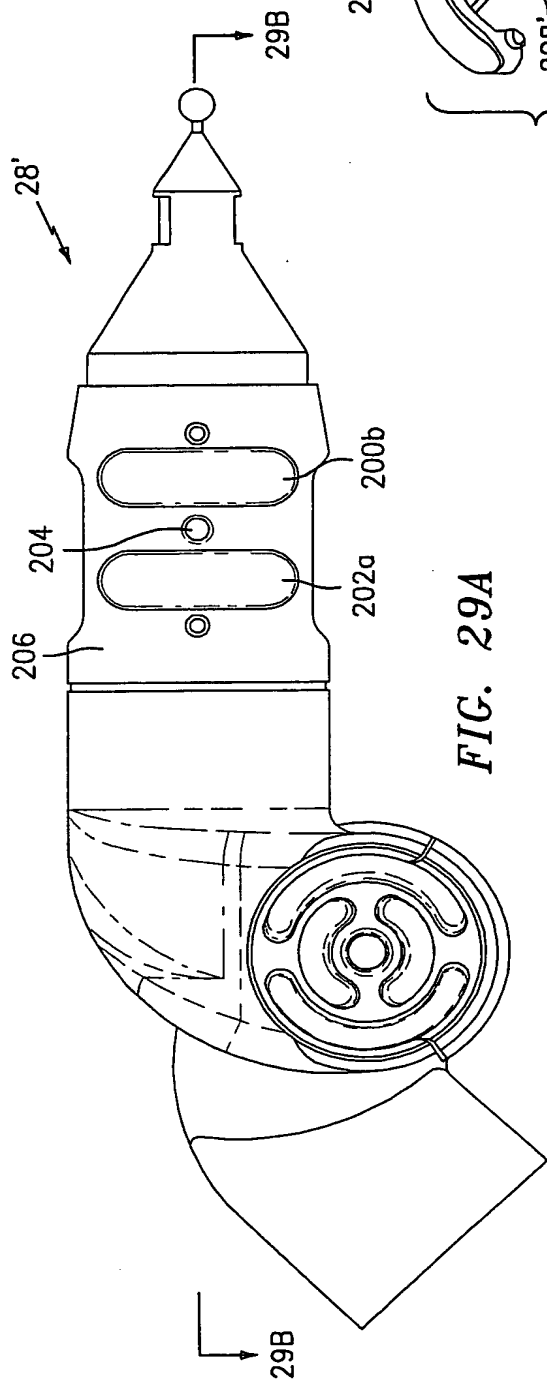


FIG. 29A

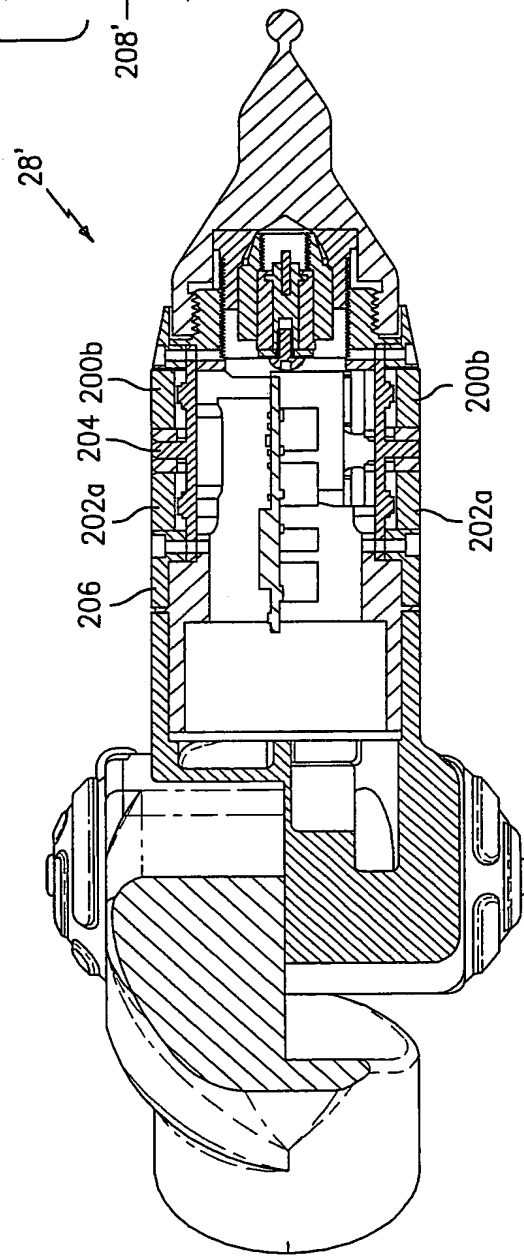
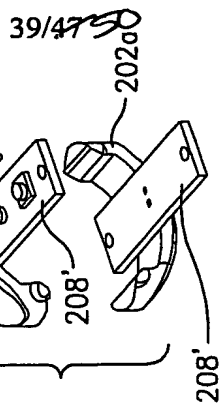
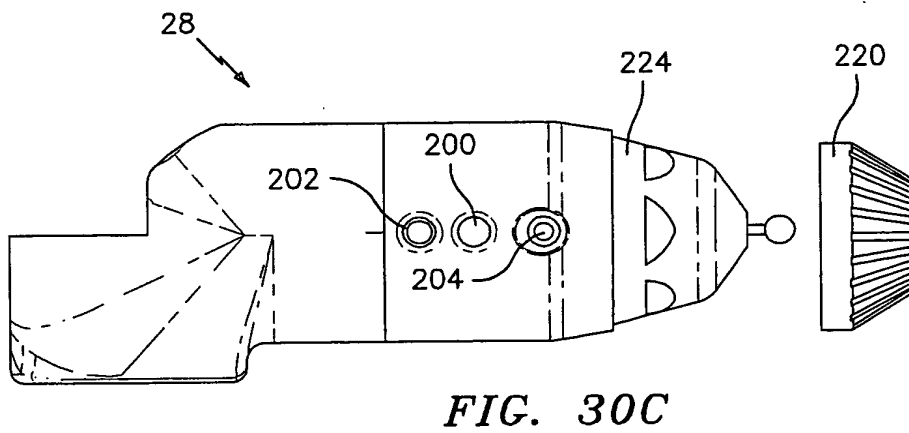
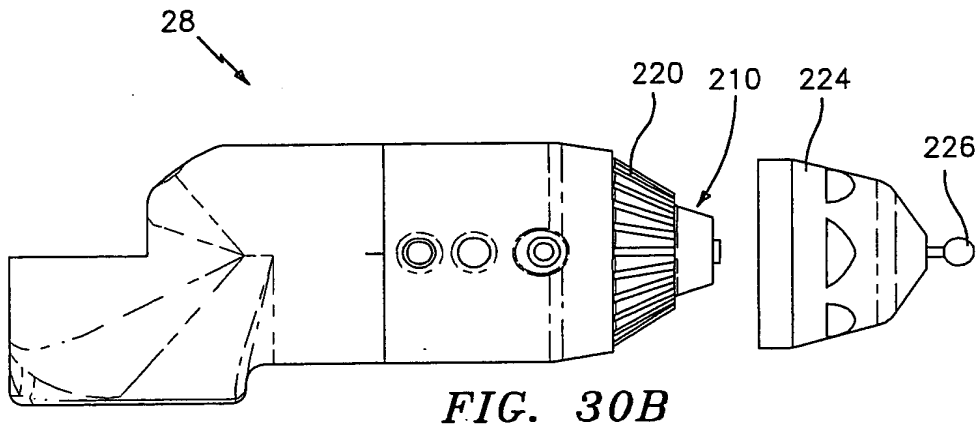
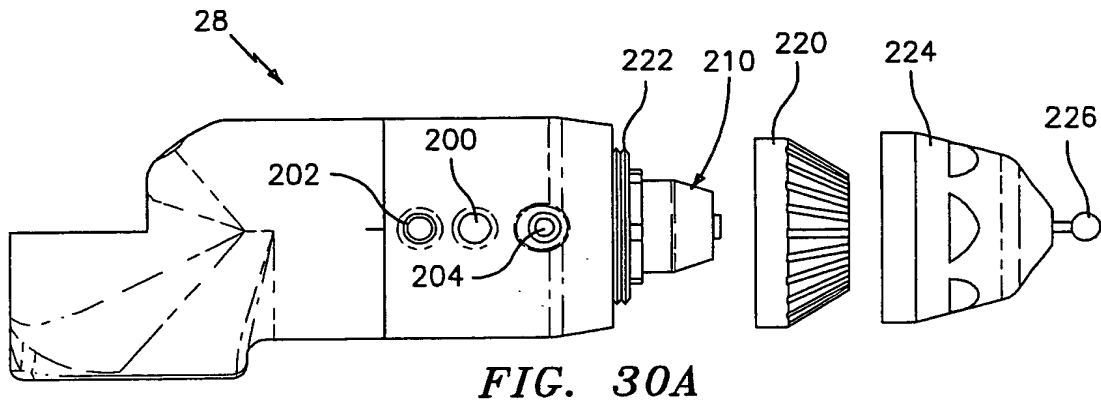


FIG. 29B



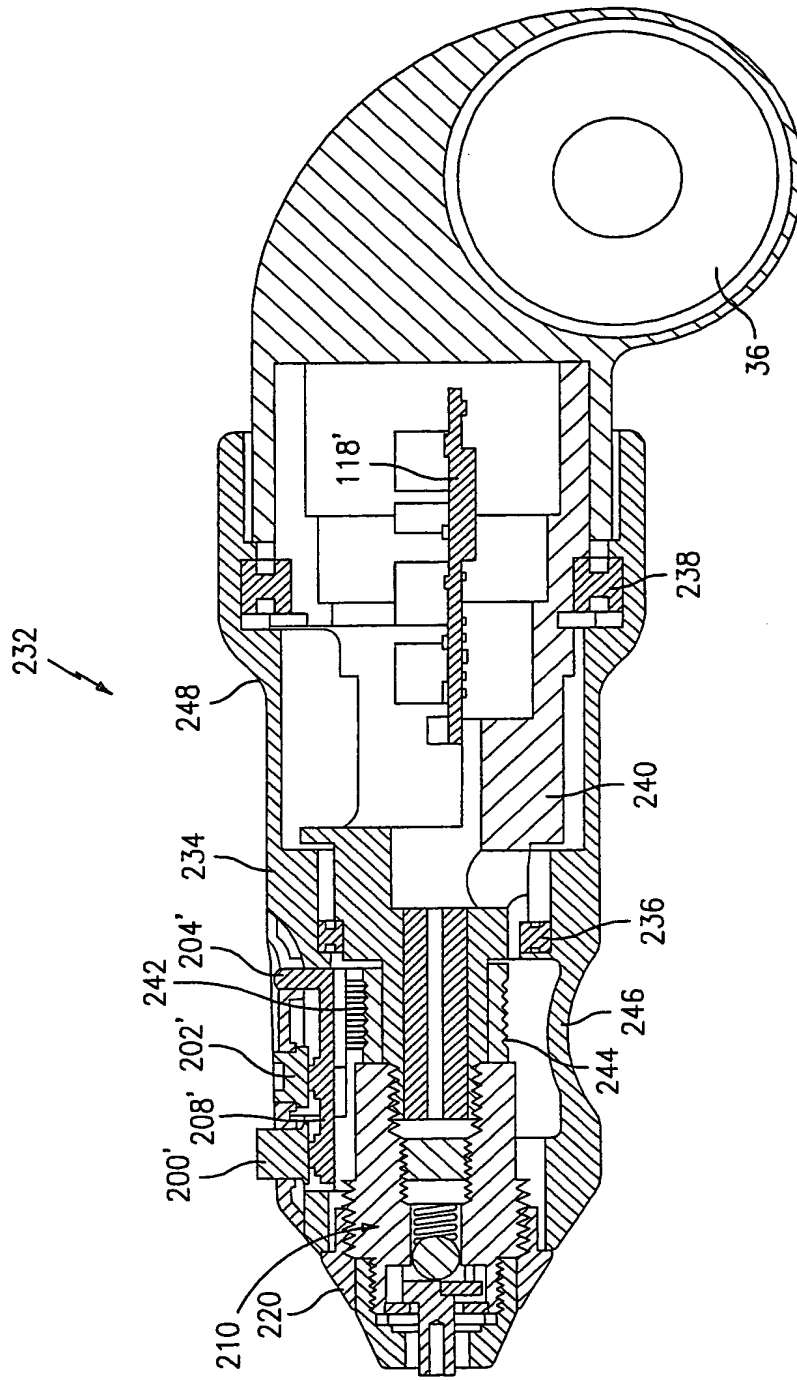


FIG. 31

This exploded perspective view illustrates the assembly of a mechanical component, designated by the reference numeral 24. The assembly includes a central cylindrical body 266 with a threaded section 268 and a base 270. A top flange 290 is positioned above the body, secured by a cap screw 298 and a bracket 296. The body is surrounded by a ring of fasteners 302, which are secured by a ring 292. A base plate 279 is shown with a curved section 276, secured by fasteners 304. A central shaft 286 passes through a series of components: a flange 282, a ring 280, a ring 284, a ring 288, a ring 294, and a ring 300. A fastener 306 is shown securing the base 270.

FIG. 32

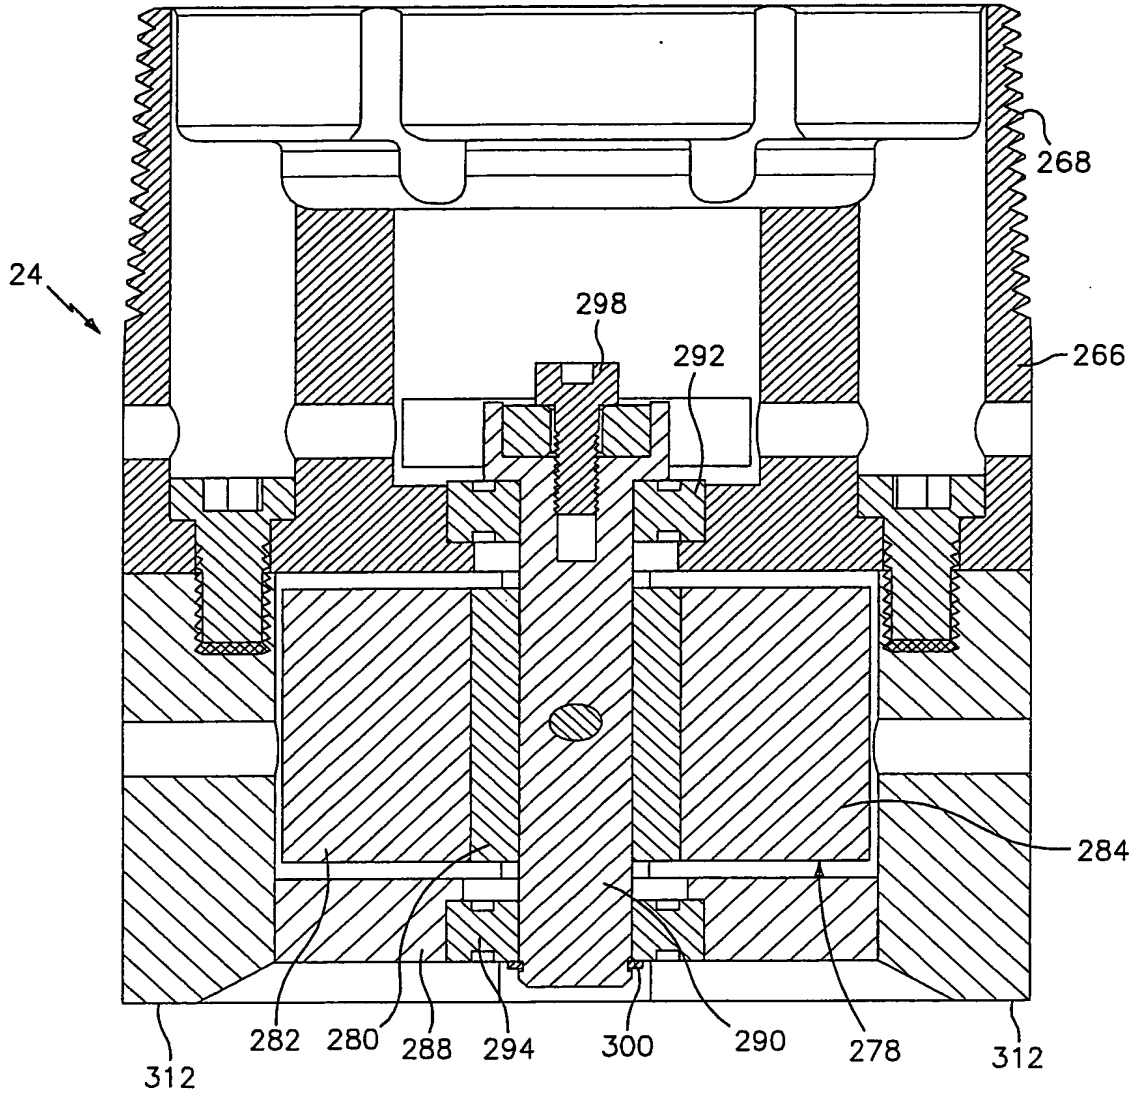


FIG. 33

451A750

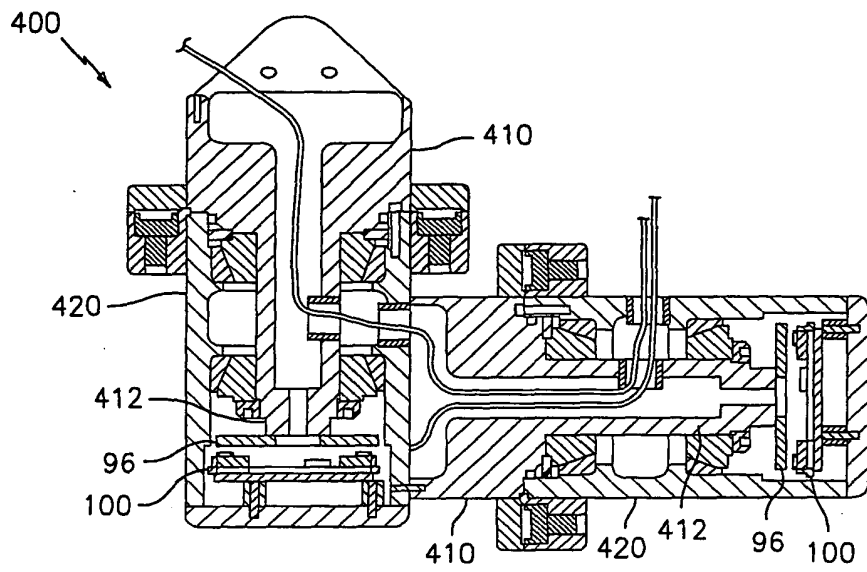


FIG. 35

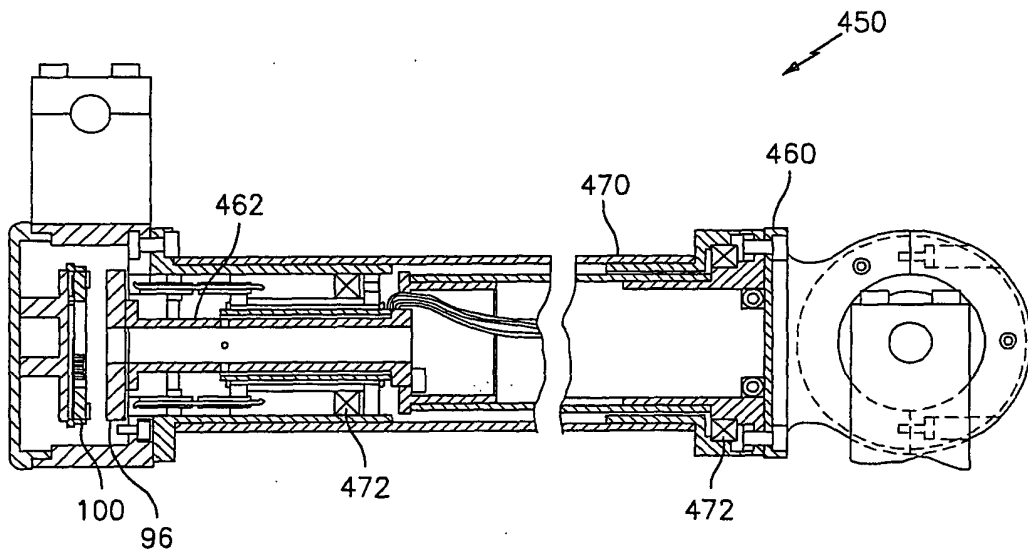


FIG. 36

46/47 50

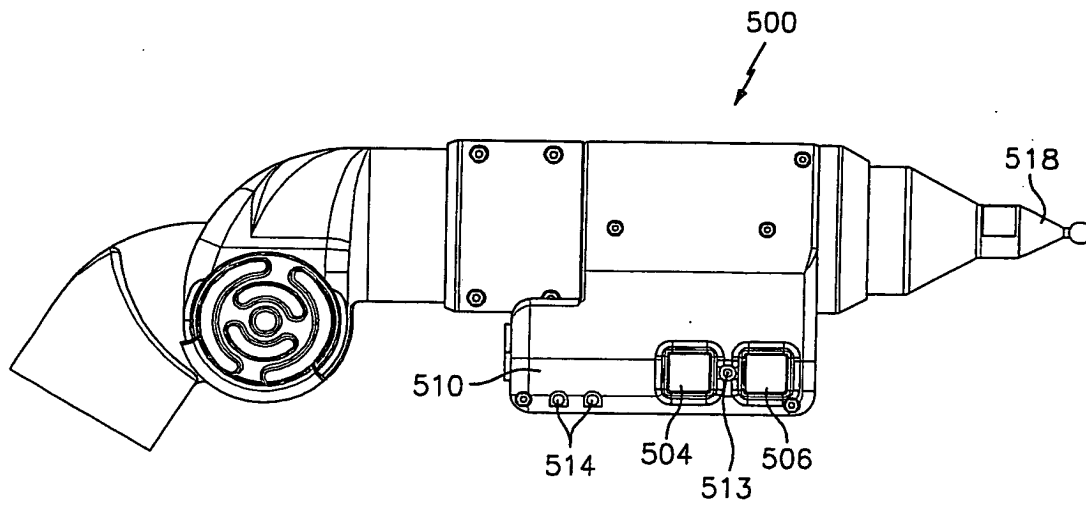


FIG. 37

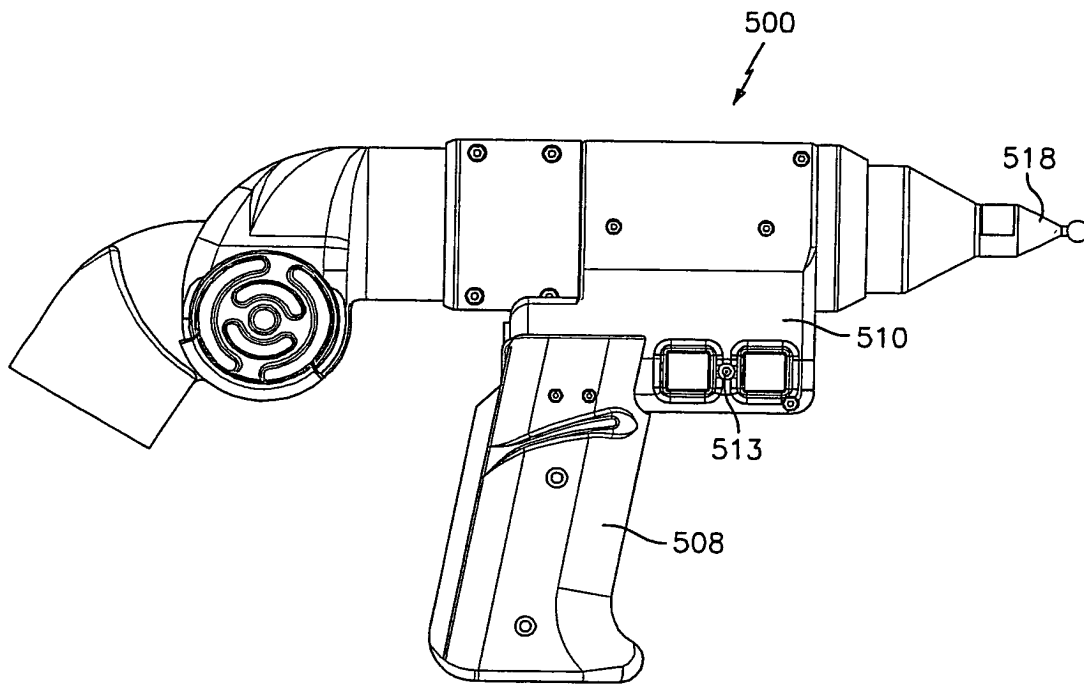


FIG. 38

47/47 50

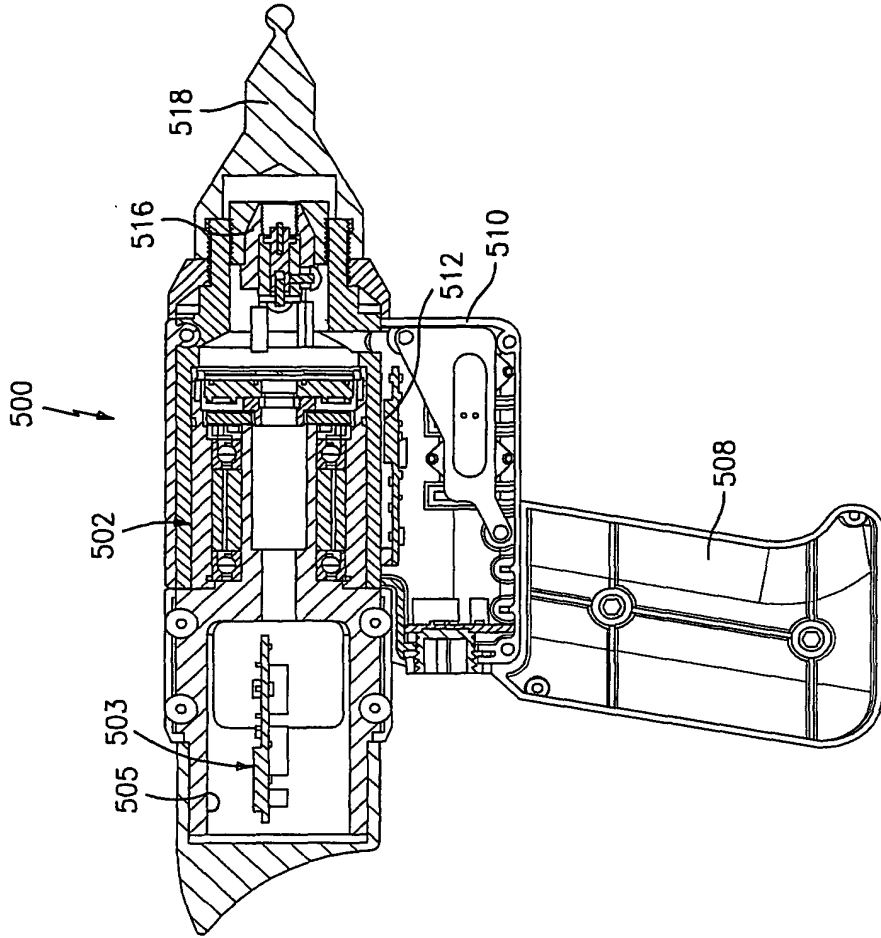


FIG. 40

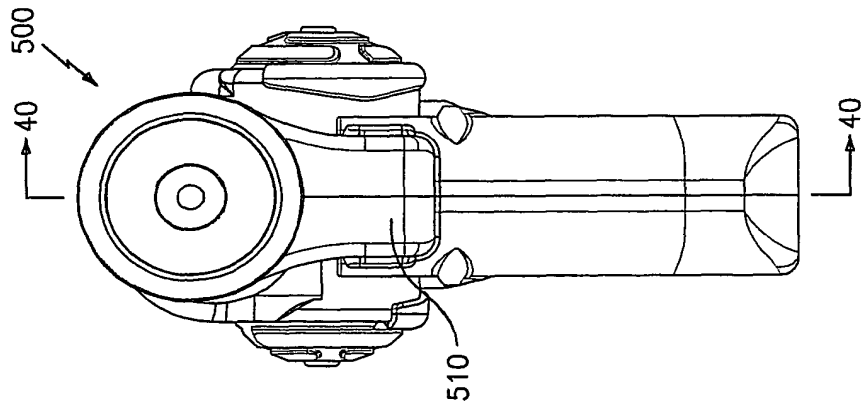


FIG. 39

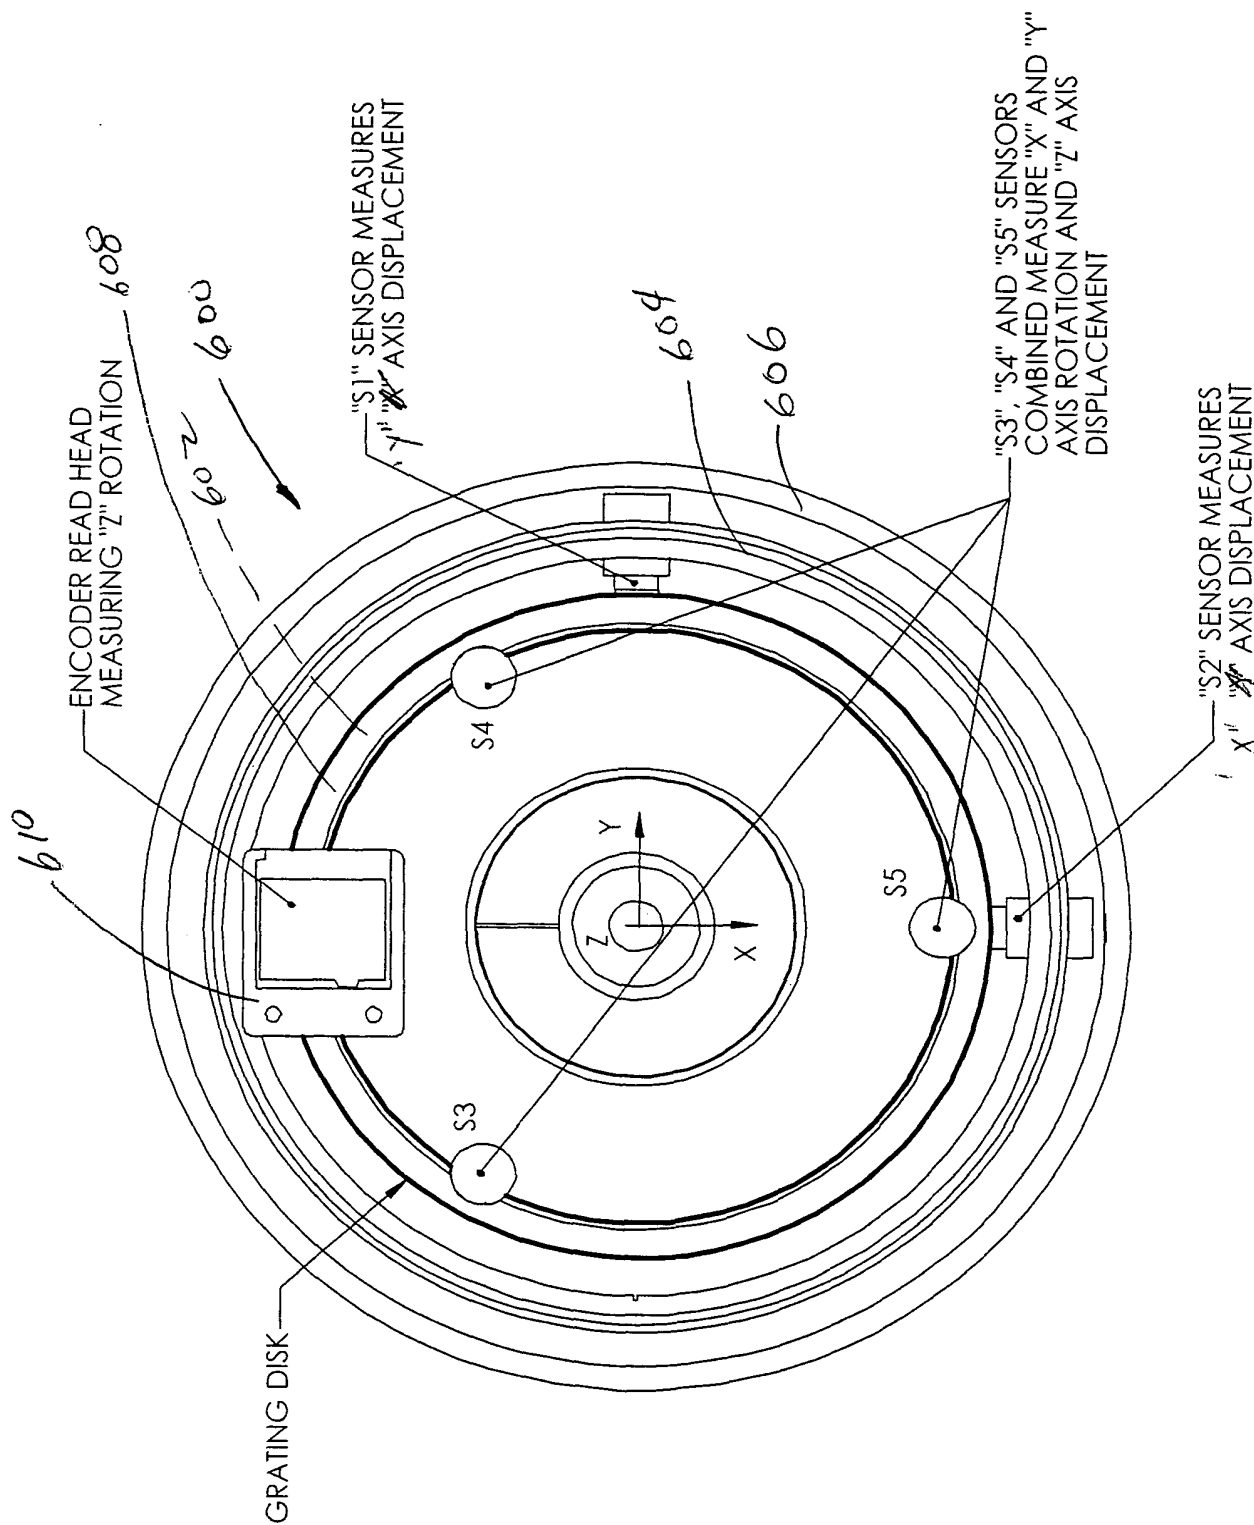


FIGURE 41

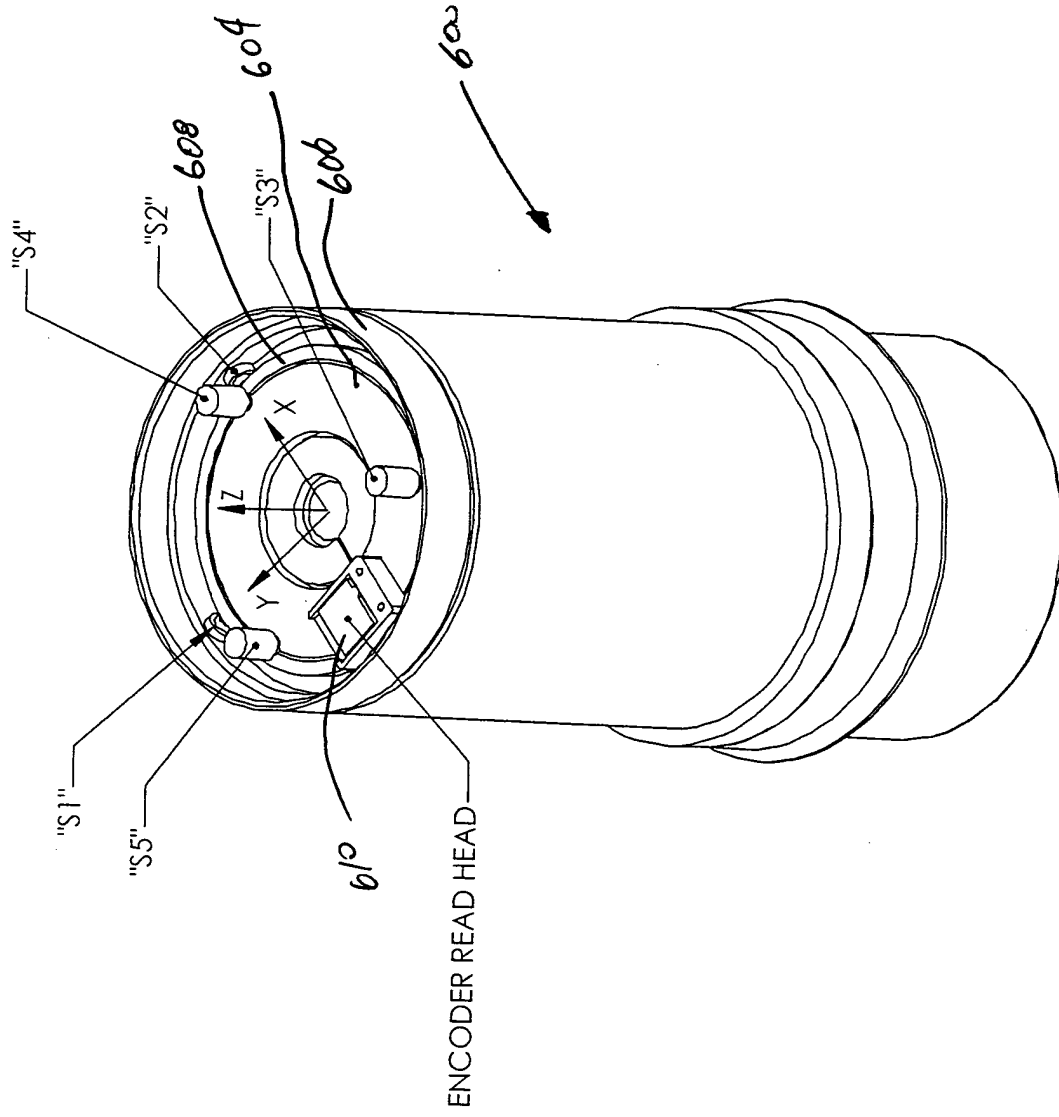


FIGURE 42

